

 **Lunatone**

INPUT DEVICES, CONTROL UNITS & SENSORS





INPUT DEVICES, CONTROL UNITS & SENSORS

Lunatone control devices and operating modules are flexible, user-friendly and can be easily adapted to a wide range of applications. Various functions can be programmed and commands can be

sent to individual addresses, groups or to the entire installation. The product range includes pushbutton couplers, rotary dimmers, Touchpanels and many other control units and sensor modules.

TABLE OF CONTENTS

DALI-2 Display 4" and 7"	2	DALI 100K - DALI interface for 100kΩ potentiometer	23
DALI-2 Display 7" Emergency	4	EnOcean DALI-2 MC	24
DALI-2 Display Bus Extension	5	DALI GC(-A) - controlling two DALI groups	24
DALI-2 Touchpanel	6	DALI SC(-A) - controlling four DALI scenes	25
DALI Touchpanel	8	DALI LR PS 20mA - automatic power reduction / night-time	
DALI Bluetooth Interface	8	brightness reduction	25
DALI Touchpanel Bluetooth 4.0	9	DALI-2 Sequencer - recalling command sequences	26
DALI-2 KNX Room Controller	10	DALI CDC - time based colour temperature control	27
DALI-2 Room Controller	10	DALI-2 RTC+ Timer	28
DALI Cockpit Mobile - Smartphone application	11	DALI NFC App - configuration of basic settings	28
DALI ROT	12	DALI Daylight Interface	29
DALI-2 ROT	14	DALI-2 Audio Interface	29
DALI-2 ROT Touch	16	DALI-2 CS	30
DALI-2 Switch Cross NFC	17	DALI-2 CS Integration THP LE	34
wDALI Switch Cross	18	DALI-2 CS Mini	35
wDALI Remote	19	DALI-2 CS Corridor	36
wDALI MC - wireless pushbutton coupler	20	DALI CS with 20mA DALI bus power supply	37
DALI-2 MC - pushbutton coupler	20	DALI SI, SI-1L	37
DALI-2 MC1L - pushbutton coupler	21	DALI-2 LS - light sensor	38
DALI-2 MC4L - pushbutton coupler	22	DALI Temp - temperature sensor	38
DALI-2 MC1L PS, MC2L PS	22		
DALI-2 MC4L POT1 - pushbutton coupler	23		

DALI-2 Display 4" and 7"


The DALI-2 Display with capacitive touch and 24 bit colour depth allows depending on the model, commissioning as well as control and operation of a DALI system. The DALI-2 Display can be individually designed using numerous widgets. Supported functions include dimming and switching, recall of scenes, RGB

colour management and colour temperature control. The display has a DALI and a WLAN interface. Depending on the model, it is also possible to measure and display the room temperature, humidity, air pressure and air quality via integrated sensors.



NAME	ARTICLE NUMBER	BRIEF DESCRIPTION	INTERFACE	COLOUR	OPERATING TEMP. (TA)	DIMENSIONS (MM)
DALI-2 Display 7" (white)	86456840-W	configurable control elements for switching, dimming, scenes and colour control	DALI, WLAN, Ethernet	white	-10 ... +50°C	178x111x8
DALI-2 Display 7" plus (white)	86456840-P-W	configurable control elements for switching, dimming, scenes and colour control, addressing, time switch, sequencer, circadian daylight schedule	DALI, WLAN, Ethernet	white	-10 ... +50°C	178x111x8
DALI-2 Display 7" (black)	86456840-B	configurable control elements for switching, dimming, scenes and colour control	DALI, WLAN, Ethernet	black	-10 ... +50°C	178x111x8
DALI-2 Display 7" plus (black)	86456840-P-B	configurable control elements for switching, dimming, scenes and colour control, addressing, time switch, sequencer, circadian daylight schedule	DALI, WLAN, Ethernet	black	-10 ... +50°C	178x111x8
DALI Display 4" (white)	86456841-W	configurable control elements for switching, dimming, scenes and colour control	DALI, WLAN	white	-10 ... +50°C	88x88x8,5
DALI-2 Display 4" plus (white)	86456841-P-W	configurable control elements for switching, dimming, scenes and colour control, addressing	DALI, WLAN	white	-10 ... +50°C	88x88x8,5
DALI Display 4" (black)	86456841-B	configurable control elements for switching, dimming, scenes and colour control	DALI, WLAN	black	-10 ... +50°C	88x88x8,5
DALI-2 Display 4" plus (black)	86456841-P-B	configurable control elements for switching, dimming, scenes and colour control, addressing	DALI, WLAN	black	-10 ... +50°C	88x88x8,5

Installation example DALI-2 Display 4"

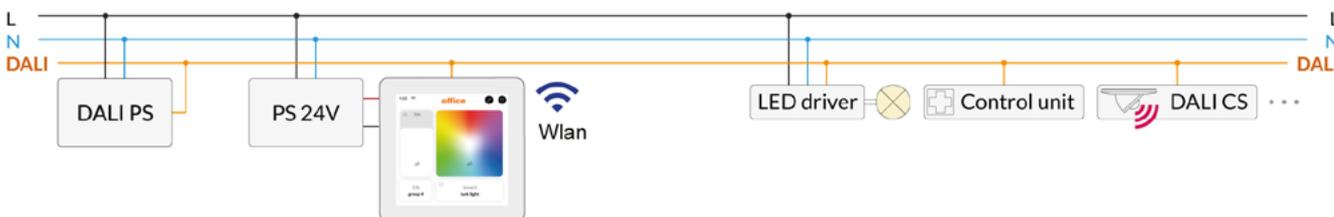

The user interface of the DALI-2 Display

The user interface of the DALI-2 Display is made up of individual pages (boards) and the operating elements (widgets) on them.

Board
name of the page (board) is displayed on top, any number of boards can be created.

Widgets
control elements with different functions: ON/OFF, dimming, colour temperature, colour, scenes, visualization of sensor values, links to boards, DALI-2 instances, etc.




Configuration menu
Settings for boards, general settings, and settings for the DALI system

Editor
for creating and editing boards and widgets

Navigation
move finger up and down on the screen to navigate up and down, swipe right and left to switch between boards

Automation: Circadian Daylight Schedule (Human Centric Lighting) – preview DALI-2 Display 7" plus

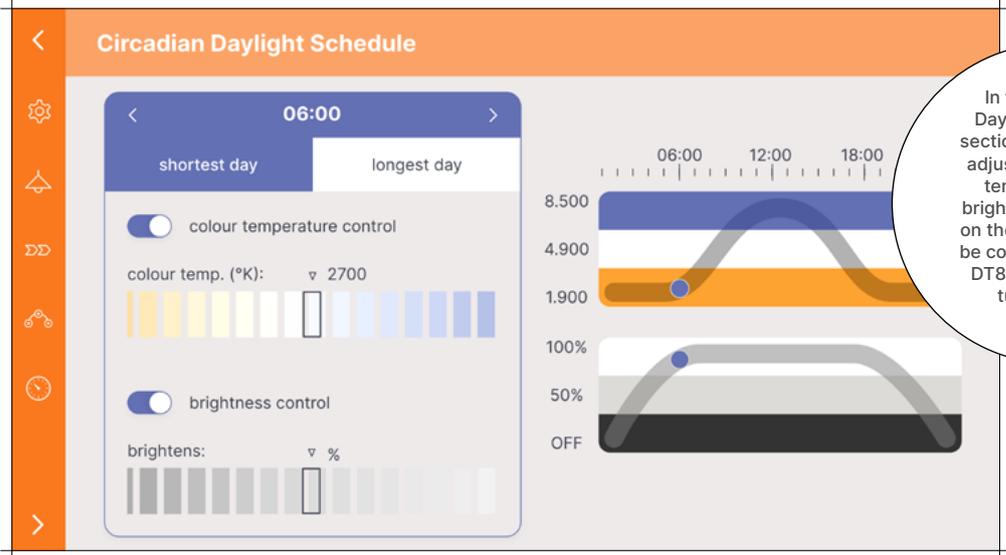

In the "Circadian Daylight Schedule" section, the automatic adjustment of colour temperature and brightness depending on the time of day can be configured for DALI DT8 luminaires with tunable white capability.

Automation: Sequences – preview DALI-2 Display 7" plus




In the "Sequence" section, time-based DALI command sequences can be defined. Sequences can be started and stopped via widgets.

DALI-2 Display 7" Emergency


The DALI-2 Display 7" Emergency is a multifunctional control and operating unit for DALI emergency light systems. On the home screen the display shows the status of the emergency lighting system and results of the last performed tests. The configuration menu can be used to schedule and automate

communication, function and duration tests. The device thus allows automatic and uncomplicated monitoring and functionality checks of the emergency lighting system. The test results are logged and can be emailed or downloaded via the display's web interface.

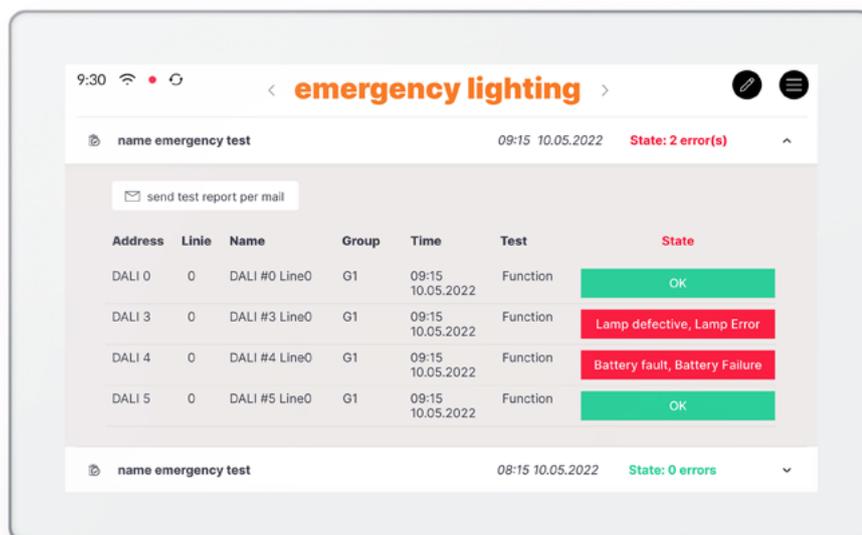

NAME	ARTICEL NUMBER	BRIEF DESCRIPTION	INTERFACE	COLOUR	OPERATING TEMP. (TA)	DIMENSIONS (MM)
DALI-2 Display 7" Emergency white	86456840-EM-W	capacitive touchscreen with 24-bit colour depth, emergency light unit for 64 DALI addresses	DALI, WLAN, Ethernet	white	-10 ... +50°C	178x111x8
DALI-2 Display 7" Emergency Plus white	86456840-P-EM-W	capacitive touchscreen with 24-bit colour depth, emergency light unit for 64 DALI addresses, including all functionality of the DALI-2 Display Plus	DALI, WLAN, Ethernet	white	-10 ... +50°C	178x111x8
DALI-2 Display 7" Emergency black	86456840-EM-B	capacitive touchscreen with 24-bit colour depth, emergency light unit for 64 DALI addresses	DALI, WLAN, Ethernet	black	-10 ... +50°C	178x111x8
DALI-2 Display 7" Emergency Plus black	86456840-P-EM-B	capacitive touchscreen with 24-bit colour depth, emergency light unit for 64 DALI addresses, including all functionality of the DALI-2 Display Plus	DALI, WLAN, Ethernet	black	-10 ... +50°C	178x111x8

Installation example DALI-2 Display 7" Emergency

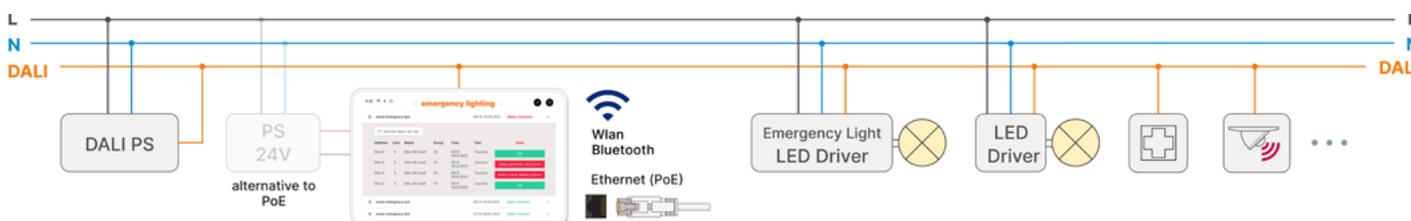

Emergency Tests: communication, function and duration test - preview: DALI-2 Display 7" Emergency

Emergency test reports: Full test report logs can be downloaded from the display's web interface

Three different emergency test types are available for different emergency groups or emergency groups and can be scheduled for different time intervals

DALI-2 Display Bus Extension

The module is used in combination with a DALI-2 Display 7" Plus or DALI-2 Display 7" Emergency. It allows a DALI system expansion with up to 3 additional DALI lines.


The device has 2 Ethernet sockets for connecting the DALI-2 Display and the local network. Up to three DALI lines can be connected via terminals DA1, DA2 and DA3.

The Display Bus Extension Module requires a 24V supply (suitable power supply unit: PS 24V, 300mA, Art. Nr.: 24166012-24HS). The DIN rail housing is suitable for installation in control cabinets.



NAME	ARTICLE NUMBER	BRIEF DESCRIPTION	INTERFACE	COMPATIBILITY	SUPPLY	DIMENSIONS (MM)
DALI-2 Display	86451848	device to increase the number of DALI lines for DALI-2 Display 7" Plus & Emergency	network socket - Ethernet	86456840-P	24VDC	98x18x56
Bus Extension			network socket - Display	86456840-EM		
				86456840- P-EM		

Installation example DALI-2 Display Bus Extension

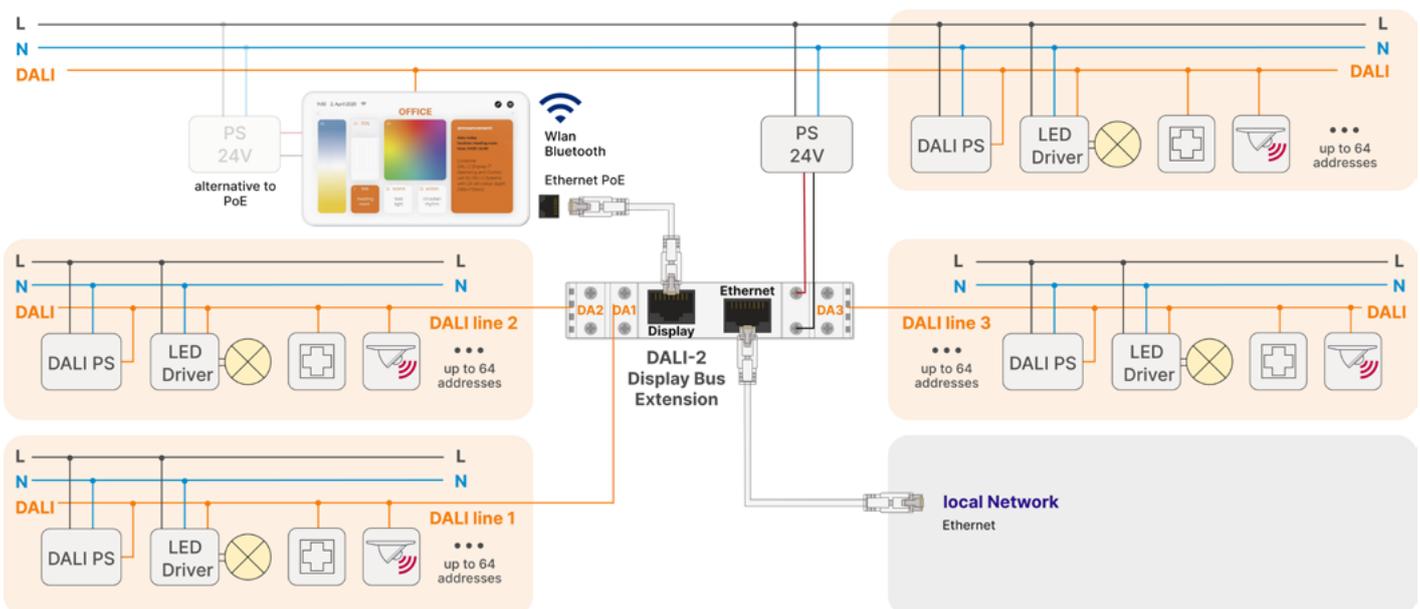

DALI-2 Touchpanel


The DALI-2 Touchpanel is a multifunctional control unit with up to 16 freely configurable buttons. The number of buttons and the associated DALI commands can be set in the PC software DALI Cockpit. The device can be adapted to a wide variety of applications. Several standard user interfaces are available and customer specific designs can be implemented upon request.

In addition to the standard functions of dimming, switching, scene recall, etc., predefined macros such as setting the colour temperature, dynamic scenes and sequences, as well as user defined command lists are supported.




NAME	ARTICLE NUMBER	BRIEF DESCRIPTION	SUPPLY	DIMENSIONS (MM)
DALI-2 Touchpanel	24035410-G__	DALI-2 Touchpanel with a user interface of choice: G01A to G09A	via DALI line	87×87×9,5
DALI-2 Touchpanel with DALI PS (70mA)	24035410-PS-G__	DALI-2 Touchpanel with 70mA DALI bus power supply + user interface of choice: G01A to G09A	mains (integrated DALI power supply 70mA)	88×88×38,5

Installation example DALI-2 Touchpanel

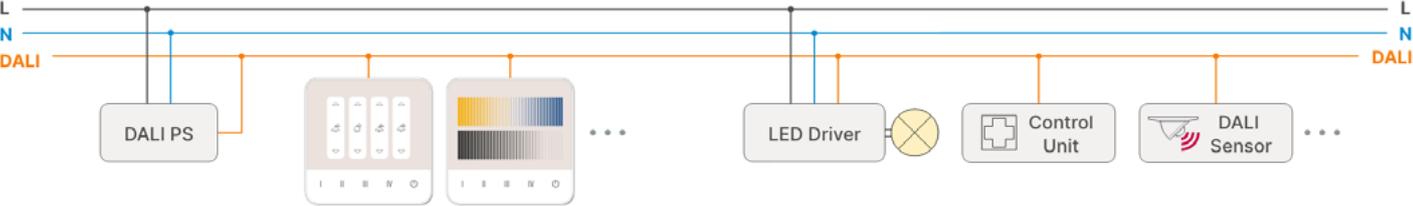

Part numbering system:

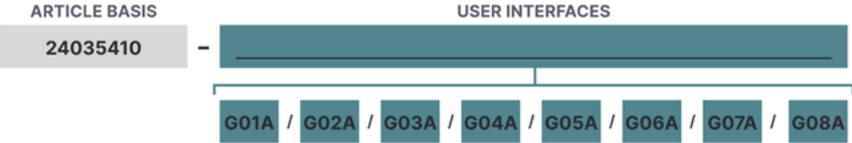

→ see overview: Standard DALI-2 Touchpanel user interfaces

custom design?
use our [online configurator](#) or send an inquiry to: customlayout@lunatone.com

Standard DALI-2 Touchpanel user interfaces:

G01A

Art. Nr.: 24035410-G01A
Function: 1 brightness slider, arrow keys for fine adjustment
Menu bar: 4 scenes, on / off

G02A


Art. Nr.: 24035410-G02A
Function: 4 groups on / off and dimmable with respective arrow keys
Menu bar: 4 scenes, on / off

G03A


Art. Nr.: 24035410-G03A
Function: 1 brightness slider, 1 tunable white slider
Menu bar: 4 scenes, on / off

G04A

Art. Nr.: 24035410-G04A
Function: 4 groups on / off, 1 brightness slider, 1 tunable white slider
Menu bar: 4 scenes, on / off

<p>G05A</p>  <p>Art. Nr.: 24035410-G05A Function: 4 groups on/off and dimmable with respective arrow keys, 1 tunable-white slider Menu bar: 4 scenes, on / off</p>	<p>G06A</p>  <p>Art. Nr.: 24035410-G06A Function: 1 brightness slider, 1 RGB colour slider Menu bar: 4 scenes, on / off</p>	<p>G07A</p>  <p>Art. Nr.: 24035410-G07A Function: 4 groups on / off, 1 brightness slider, 1 RGB colour slider Menu bar: 4 scenes, on / off</p>	<p>G08A</p>  <p>Art. Nr.: 24035410-G08A Function: 4 groups on/off and dimmable with respective arrow keys, 1 tunable-white slider Menu bar: 4 scenes, on / off</p>	<p>G09A</p>  <p>Art. Nr.: 24035410-G09A Function: 1 brightness slider, 1 RGBW colour+white slider Menu bar: 4 scenes, on / off</p>
---	--	---	--	---

Overview DALI Cockpit – user interface configuration:

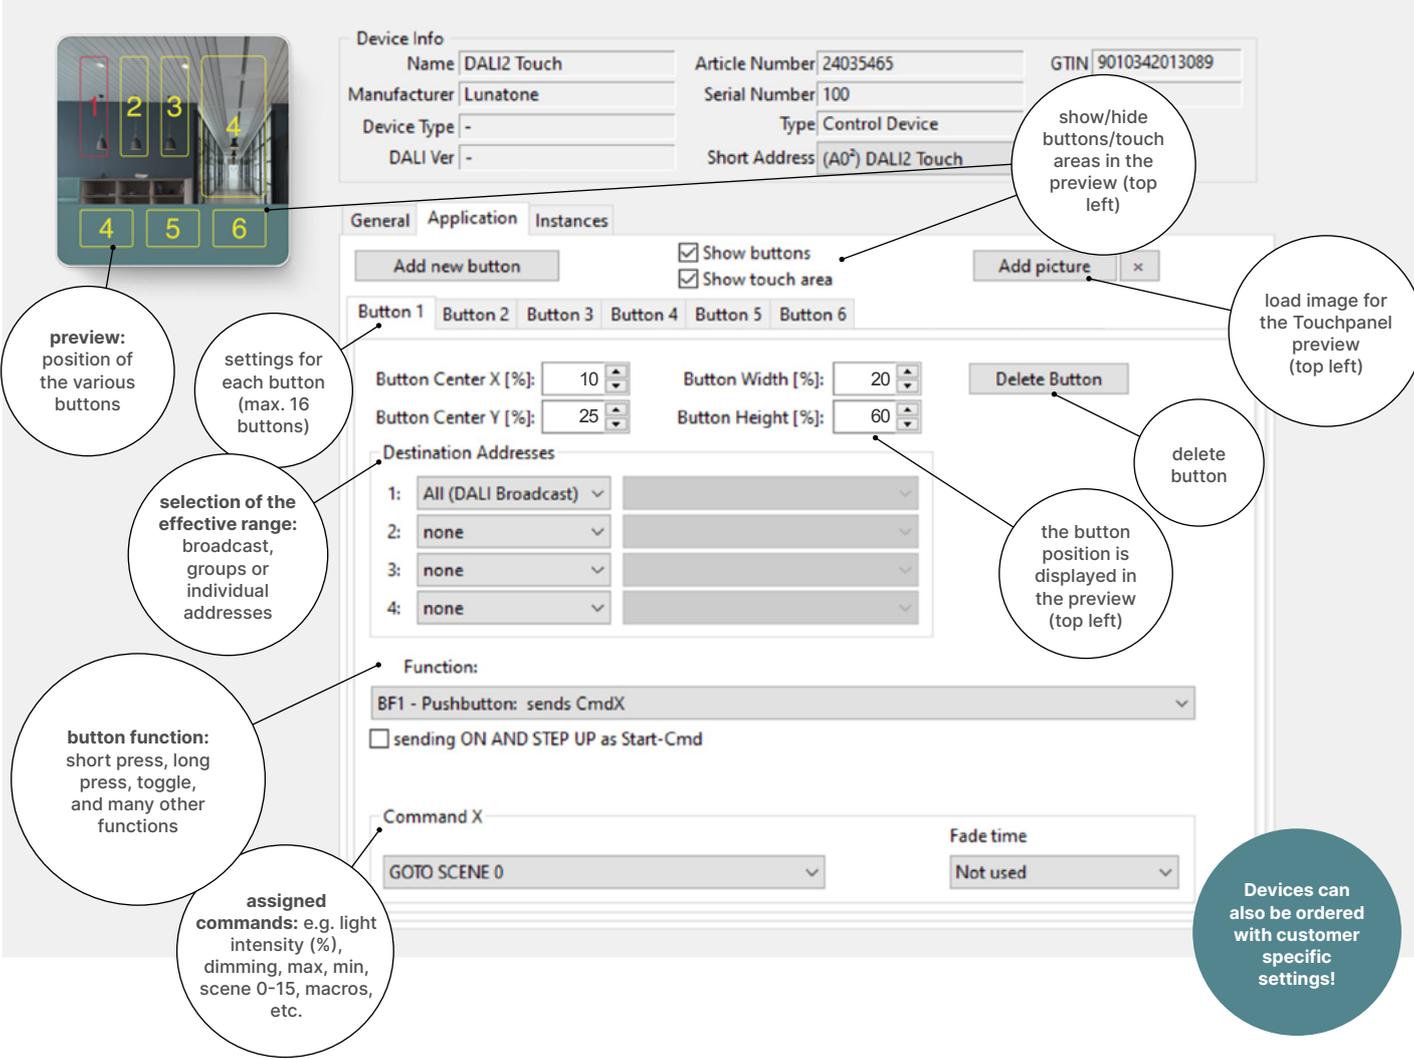

Device Info
 Name: DALI2 Touch | Article Number: 24035465 | GTIN: 9010342013089
 Manufacturer: Lunatone | Serial Number: 100 | Type: Control Device
 Device Type: - | Short Address: (A0²) DALI2 Touch | DALI Ver: -

General | Application | Instances

Buttons: Button 1, Button 2, Button 3, Button 4, Button 5, Button 6

Settings:
 Add new button | Show buttons (checked) | Show touch area (checked) | Add picture (x) | Delete Button

Button 1 Configuration:
 Button Center X [%]: 10 | Button Width [%]: 20 | Button Center Y [%]: 25 | Button Height [%]: 60

Destination Addresses:
 1: All (DALI Broadcast) | 2: none | 3: none | 4: none

Function:
 BF1 - Pushbutton: sends CmdX
 sending ON AND STEP UP as Start-Cmd

Command X:
 GOTO SCENE 0 | Fade time: Not used

Callouts:
 - preview: position of the various buttons
 - settings for each button (max. 16 buttons)
 - selection of the effective range: broadcast, groups or individual addresses
 - button function: short press, long press, toggle, and many other functions
 - assigned commands: e.g. light intensity (%), dimming, max, min, scene 0-15, macros, etc.
 - show/hide buttons/touch areas in the preview (top left)
 - load image for the Touchpanel preview (top left)
 - delete button
 - the button position is displayed in the preview (top left)
 - Devices can also be ordered with customer specific settings!

DALI Touchpanel

The DALI Touchpanel is a multifunctional control unit with up to 12 freely configurable buttons. The operating panel can be customised and adjusted to any installation by replacing the paper inlay. Four layout cards are included in the scope of delivery. The number of buttons and the associated DALI commands can be set in the PC software DALI Cockpit. Each button can be individually configured with target address, button behaviour and DALI commands. In addition to the standard functions of dimming, switching, scene recall, etc., predefined macros such as setting the colour temperature, dynamic scenes and sequences, as well as user defined command lists are supported.



NAME	ARTICLE NUMBER	SUPPLY	TYP. CURRENT CONSUMPTION DALI	DIMENSIONS (MM)
DALI Touchpanel	24035465	via DALI line	4mA	111 × 83 × 9

Installation example DALI Touchpanel



DALI Bluetooth Interface

The DALI Bluetooth Interface allows the connection to the Lunatone Touch App available for iOS and Android devices via Bluetooth. Individual layouts and menus can be stored on www.dalitouch.com and shared with other users. The Bluetooth-devices have a reception range of about 10-15m.


DALI Touch

Here you can download the app for your smartphone:



NAME	ARTICLE NUMBER	SUPPLY	TYP. CURRENT CONSUMPTION DALI	DIMENSIONS (MM)
DALI Bluetooth Interface 4.0	89453584	via DALI line	4mA	59 × 33 × 15

Typical setup for colour and colour temperature control:

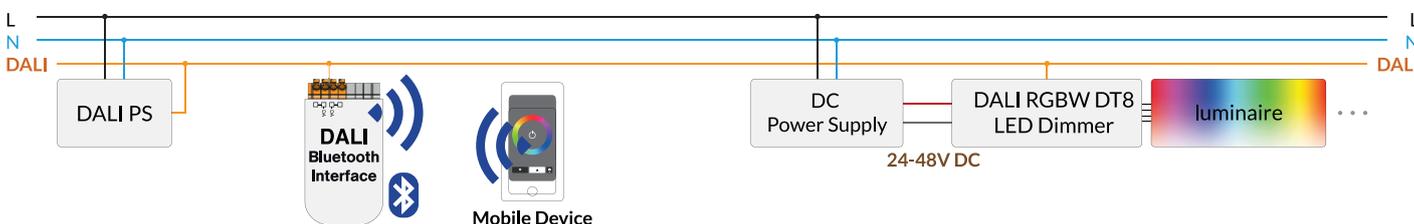

DALI Touchpanel Bluetooth 4.0

The DALI Touchpanel is a multifunctional DALI control unit with up to 12 freely configurable buttons and Bluetooth connection to iOS and Android devices (DALI Touch App). Individual layouts and menus can be stored on www.dalitouch.com and shared with other users. The Bluetooth-devices have a reception range of about 10-15m.




DALI Touch

Here you can download the app for your smartphone:



NAME	ARTICLE NUMBER	SUPPLY	TYP. CURRENT CONSUMPTION DALI	DALI TOUCH APP	DIMENSIONS (MM)
DALI Touchpanel Bluetooth 4.0	24035465-BT	via DALI line	4mA	iOS und Android	111 × 83 × 9

Typical setup for colour and colour temperature control:

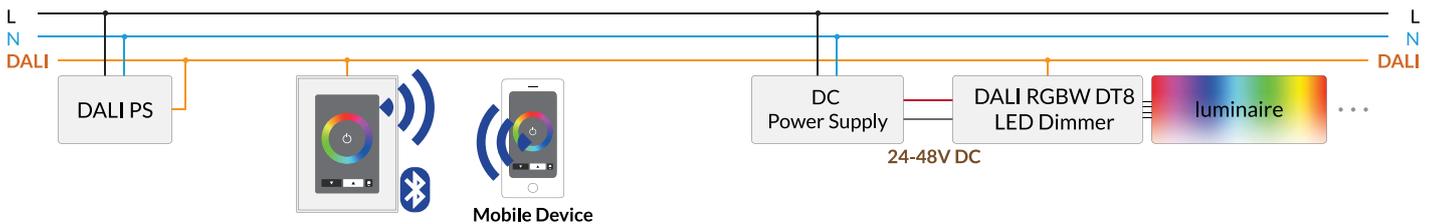

Overview DALI Cockpit – user interface configuration:

Attention: save created functions!

add / delete button

enter button position

select effective range: broadcast, groups or individual addresses

define button function: e.g. press briefly, press and hold, toggle, etc. - various operating functions are available

select button command: e.g. light intensity (%), dimming, max, min, scene 0-15, macros, etc

tick this box to use the selected layout for the Touchpanel

preview: position of the various buttons

DALI USB Interface

DALI Touchpanel

DALI-2 KNX Room Controller

The module enables commissioning, configuration and control of a DALI system via Bluetooth using the smartphone application DALI Cockpit Mobile.

The Lunatone smartphone application DALI Cockpit Mobile offers a clear and simple interface with a DALI installation assistant, various DALI configuration options and a configurable user interface to control connected DALI devices.


The module offers a KNX TP interface, which enables switching, dimming and scene control via KNX. Up to 8 gate functionalities can be implemented using the product database (ETS5/6). Each gate supports all DALI addressing types. Various KNX status objects are available for visualization.

The module has an integrated bus supply (200mA) for a DALI system of up to 64 DALI devices. The independent control gear is suitable for remote ceiling installation or integration in luminaires.



NAME	ARTICLE NUMBER	INTERFACE	INPUT SUPPLY CURRENT	OPERATING TEMPERATURE (TA)	DIMENSIONS (MM)
DALI-2 BT5 Room Controller KNX	87454427-KX	DALI, KNX, Bluetooth	mains voltage 40mA (@120Vac), 20mA (@240Vac)	-10°C ... +55°C	159 × 42 × 22

Installation example:

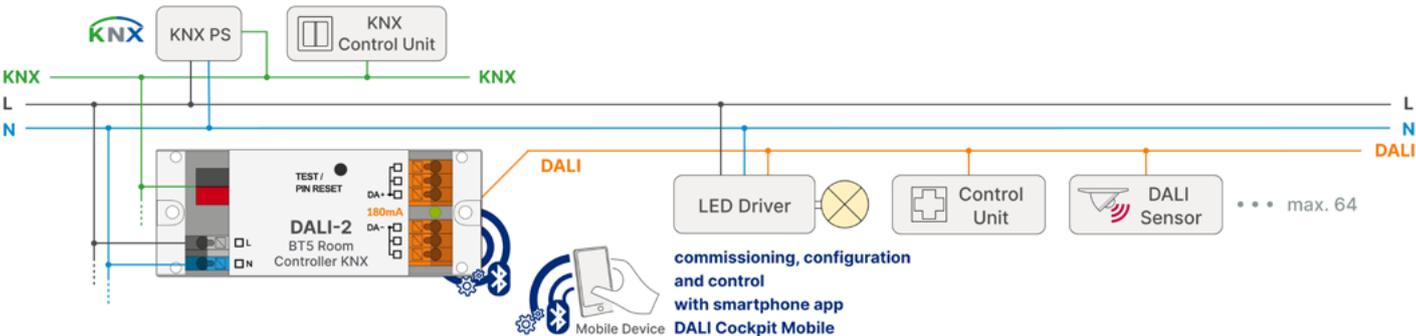


DALI-2 Room Controller

The DALI-2 Room Controller serves as an interface between Bluetooth 5.0 and DALI. The device is ideal for room solutions. The supply as well as commissioning, configuration and control of a small DALI system can be easily implemented with this device.


The module has an integrated DALI bus supply (200mA) to operate up to 64 DALI devices. A connection to the Lunatone smartphone application DALI Cockpit Mobile can be established via the Bluetooth interface. The app offers a clear and simple user interface with an installation wizard, various configuration options and a customizable user interface to control connected devices.

The independent control gear is suitable for remote ceiling installation or integration in luminaires.

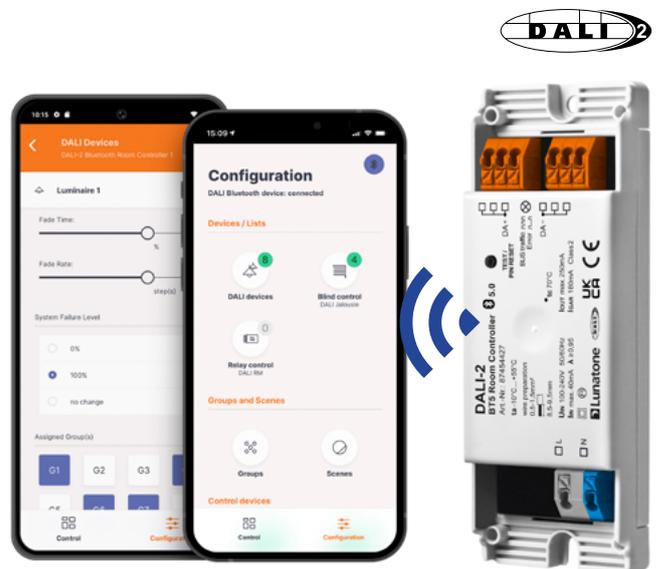

NAME	ARTICLE NUMBER	INTERFACE	INPUT SUPPLY CURRENT	OPERATING TEMPERATURE (TA)	DIMENSIONS (MM)
DALI-2 BT5 Room Controller	87454427	DALI, Bluetooth	mains voltage 40mA (@120Vac), 20mA (@240Vac)	-20°C ... +75°C	120 × 41 × 22

Installation example:

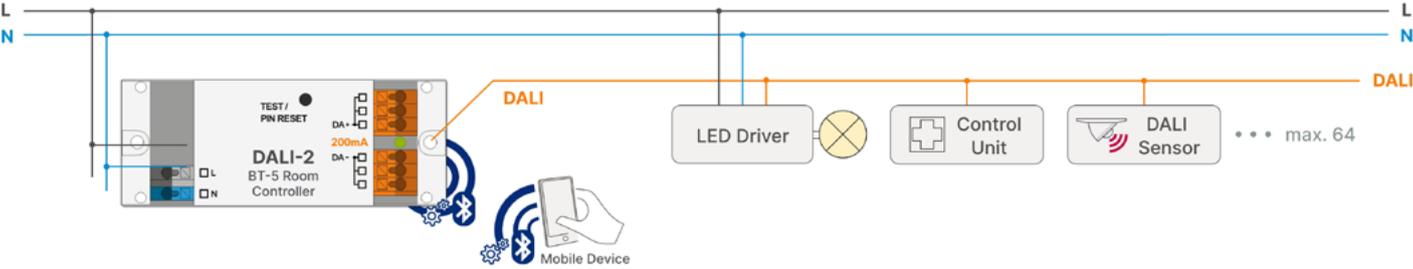


DALI Cockpit Mobile - Smartphone application

Smartphone application for easy setup and configuration of DALI systems in connection with the DALI-2 BT5 Room Controller. The DALI system can be addressed, configured and controlled


via the app. In addition, a customizable user interface can be created for light control via mobile phone.




customizable user interface for light control

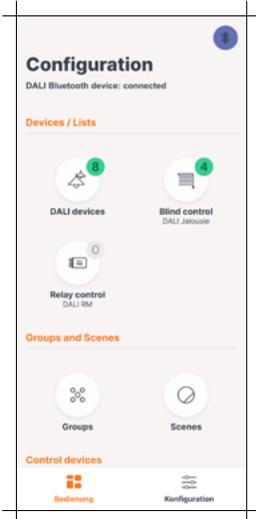

menu with various sub-items for device configuration

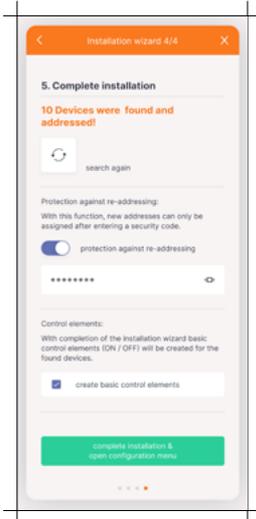

installation assistant for device addressing

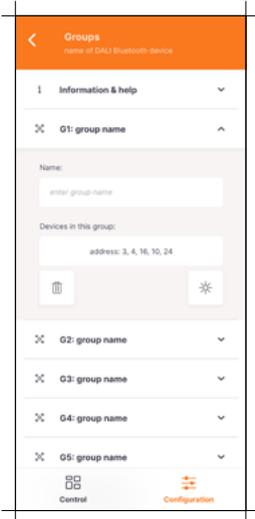

configuration page for DALI groups

DALI Cockpit Mobile

Here you can download the app for your smartphone:




settings page of push button coupler - DALI-2 MC4L




settings page of push & rotary switch - DALI-2 ROT



settings page for DALI-2 Touchpanel

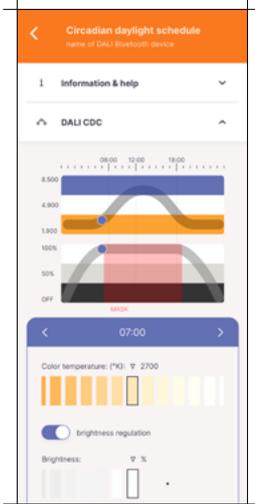

settings page for circadian daylight schedule - DALI CDC

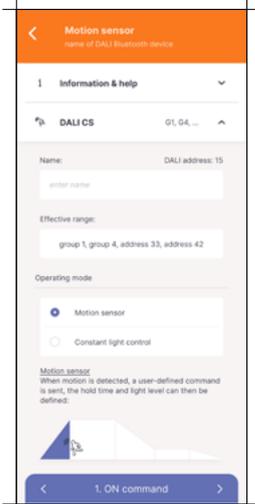

settings page of motion sensor DALI-2 CS


DALI ROT

Fast and precise control with a traditional push and rotary knob. The device is powered by the DALI bus. Target address(es), button behaviour and DALI commands can be configured with the PC software DALI Cockpit. All standard DALI commands, such as dimming, switching, scene recall, etc. are supported. Furthermore, versions for Tunable White, RGB and RGBW control are available, enabling the change of colour temperature or colour by turning the rotary knob. DALI ROT covers and knobs are available in white and black. Furthermore, the module can be combined with covers from third-party suppliers (the shaft is Ø4 mm, an adapter for Ø6mm is included in the scope of delivery). Customer specific designs can be implemented upon request.




NAME	ARTICEL NUMBER	INPUT TYPE	TYP. CURRENT CONSUMPTION DALI	OPERATING TEMPERATURE (TA)	MOUNTING	DIMENSIONS (MM)
DALI-2 ROT	86459822-__	DALI	typ. 1.6mA (at 16,5V)	-20°C ... 75°C	for flush-type installation boxes	70 × 70 × 45

Installation example:

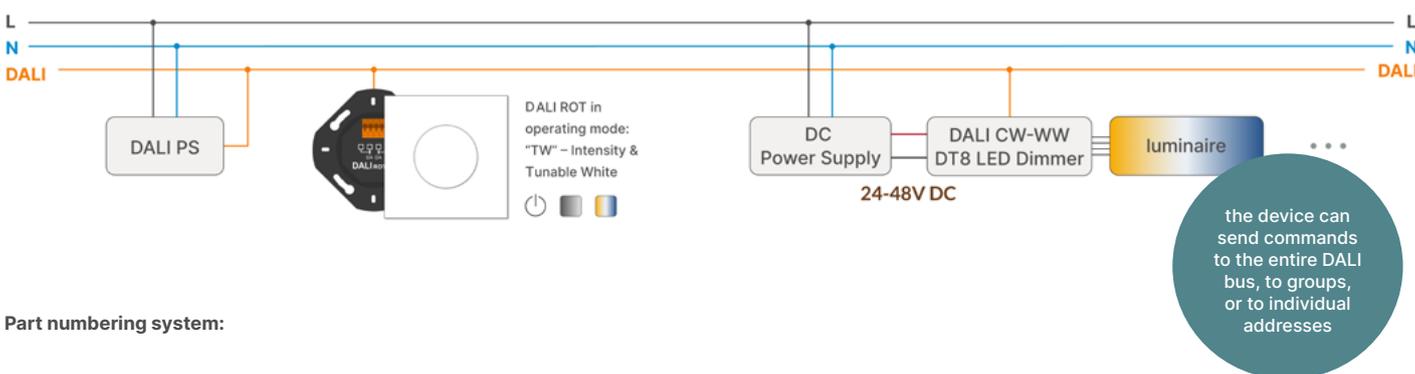



Part numbering system:

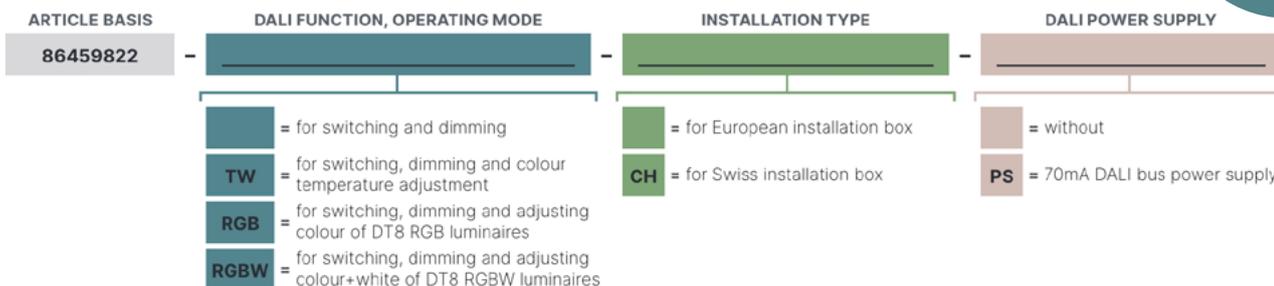

Supported operating modes:



operating mode 1 Intensity Switch / Dim	TW operating mode 2: Intensity & Tunable White	RGB operating mode 3: Intensity & RGB	RGBW operating mode 4: Intensity & RGBW
<p>ON/OFF DIM</p>	<p>ON/change mode OFF mode 1 DIM mode 2 CW-WW</p>	<p>ON/change mode OFF mode 1 DIM mode 2 RGB</p>	<p>ON/change mode OFF mode 1 DIM mode 2 RGB mode 3 White</p>
<p>press: ON / OFF rotate: dim up / down</p>	<p>short press: ON / change MODE long press: OFF mode 1 - rotate: dim up / down mode 2 - rotate: colour temperature</p>	<p>short press: ON / change MODE long press: OFF mode 1 - rotate: dim up / down mode 2 - rotate: colour (RGB)</p>	<p>short press: ON / change MODE long press: OFF mode 1 - rotate: dim up / down mode 2 - rotate: colour (RGB) mode 3 - rotate: white channel</p>

Installation type:


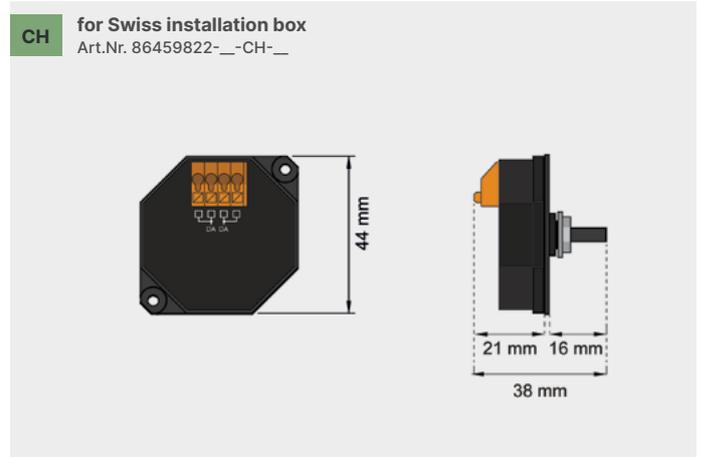
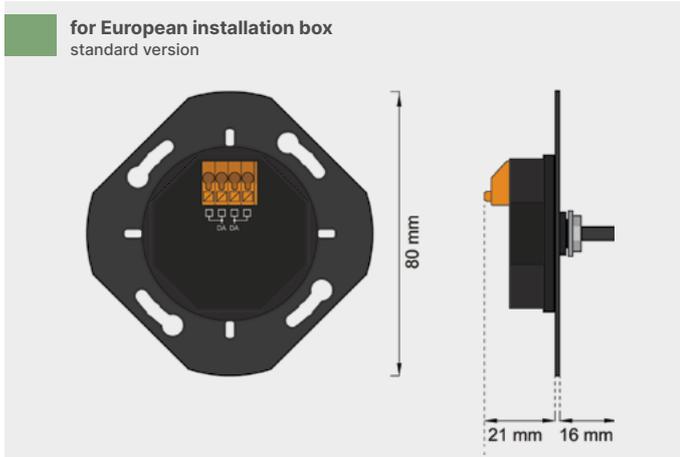


Power supply:

With the output current of up to 70mA a small DALI installation can be supplied. The device is attached to the back of the DALI-2 ROT device. Up to 3 DALI-2 ROTs with power supply can be used in one DALI line. The polarity of the DALI connections must be considered.

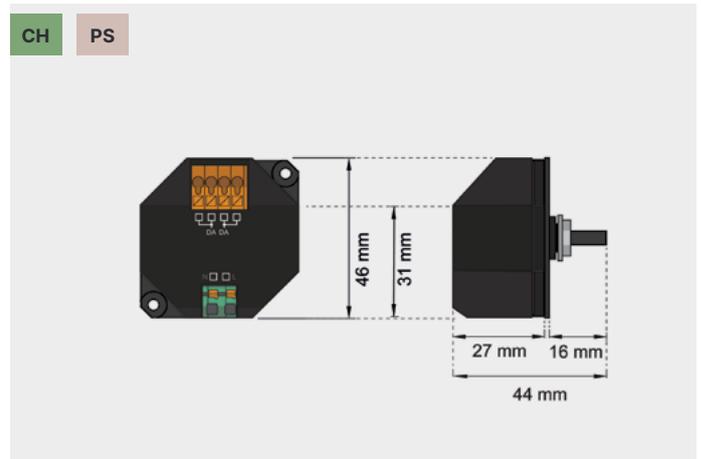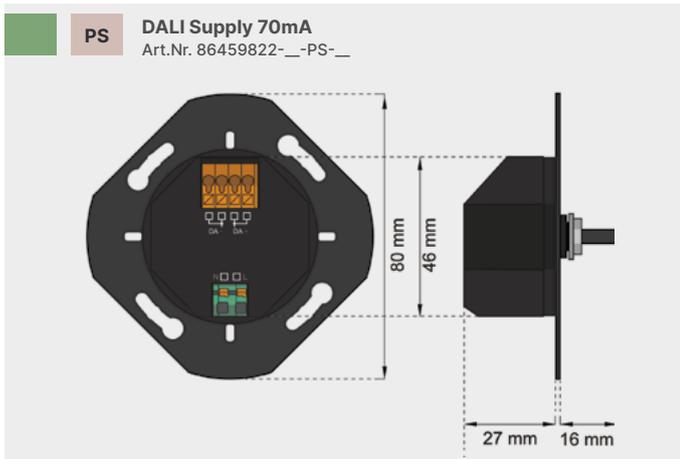

Accessories:

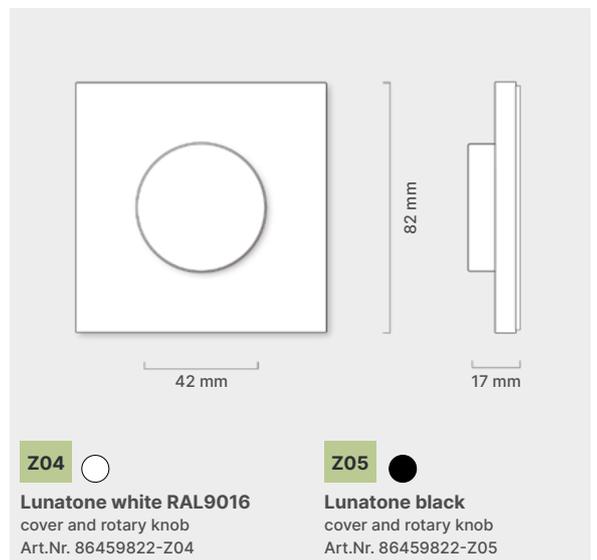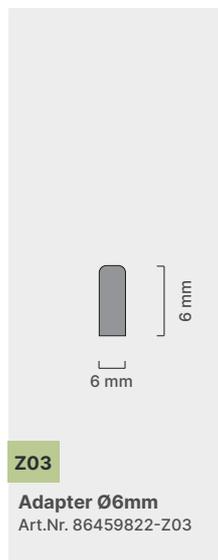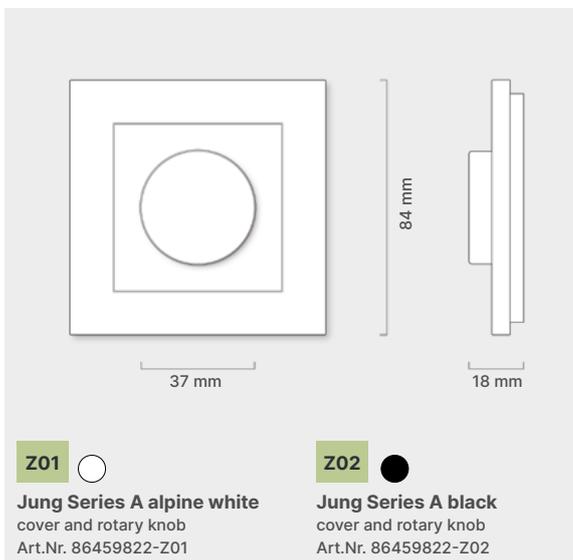

DALI-2 ROT

Rotary and push button with DALI output for fast and precise control of brightness, colour, or colour temperature. All standard functions such as dimming, switching, scene recall, etc. are supported.

The PC software DALI Cockpit can be used to set the operating mode, effective range and individual DALI commands for the push button and rotary knob.

The standard device has an application controller, but can be set to instance mode as well. The module “-D2” only supports the instance mode (sending event messages instead of direct control commands) for integration in higher-level building management systems with DALI connection, such as from WAGO or Beckhoff. The device can be mounted on commercially available flush-type installation boxes. It is directly supplied by the DALI line. DALI-2 ROT covers and knobs are available in white and black. Furthermore, the module can be combined with covers from third-party suppliers (the shaft is Ø4 mm, an adapter for Ø6mm is included in the scope of delivery). Customer specific designs



can be implemented upon request.

The module “-NFC” supports the adjustment of selected settings via smartphone (NFC capable) with the Lunatone NFC Android app, in addition to the configuration via the DALI Cockpit.

NAME	ARTICEL NUMBER	INPUT TYPE	CURRENT CONSUMPTION DALI	OPERATING TEMPERATURE (TA)	MOUNTING	DIMENSIONS (MM)
DALI-2 ROT	86459822-__	DALI	typ. 1.6mA (at 16,5V) max. 5mA (at 22,5V)	-20°C ... 75°C	for flush-type installation boxes	70 × 70 × 45

Overview DALI Cockpit, settings tab "General" :

DALI-2 settings: enabling or disabling of the application controller

pop-up: selection of the operating mode


Overview DALI Cockpit, settings tab "Application" :

selection of effective range: broadcast, groups or individual addresses

ON-command: e.g. light level (%), dim value, max, min, scene 0-15, last active level

OFF command: e.g. light level 0%, off, scene 0-15

Installation example:

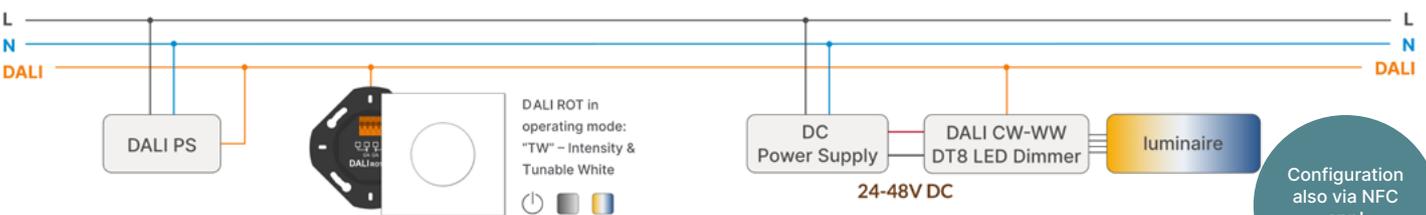

Configuration also via NFC app! page 28A

Part numbering system:



Supported operating modes:

NFC operating mode 1 - default setting: "I" – Intensity / Switch / Dim

press: ON / OFF
rotate: dim up / down

NFC operating mode 2: "TW" – Intensity & Tunable White

short press: ON / change mode, long press OFF
mode 1 rotate: dimming, mode 2 rotate: colour temp.

NFC operating mode 3: "RGB" – Intensity & RGB

short press: ON / change mode, long press OFF
mode 1 rotate: dimming, mode 2 rotate: colour

NFC Operating mode 4: "RGBW" – Intensity & RGBW

short press: ON / change mode, long press OFF
mode 1 rotate: dimming, mode 2 rotate: colour, mode 3 rotate: white channel

NFC operating mode 5: "D2I" – DALI-2 Instanzmodus

D2

press: instance 0, push button
rotate: instance 1, generic, event messages for: "start rotate clockwise", "start rotate counterclockwise", "stop rotate"

NFC operating mode 6: "BD/CD" – Balance&Dim/Colour&Dim

short press: ON / change mode, long press OFF
mode 1 rotate: dimming, mode 2 rotate: colour/colour temperature

Installation type:

EU for European installation box standard version

CH for Swiss installation box Art.Nr. 86459822-__-CH-__

Power supply:

PS DALI Supply 70mA Art.Nr. 86459822-__-PS-__

With the output current of up to 70mA a small DALI installation can be supplied. The device is attached to the back of the DALI-2 ROT device. Up to 3 DALI-2 ROTs with power supply can be used in one DALI line. The polarity of the DALI connections must be considered.

DIMENSIONS see DALI ROT

Accessories:

Z01 Jung Series A alpine white over and rotary knob Art.Nr. 86459822-Z01

Z02 Jung Series A black cover and rotary knob Art.Nr. 86459822-Z02

Z03 Adapter Ø6mm Art.Nr. 86459822-Z03

Z03 Adapter Ø6mm Art.Nr. 86459822-Z03

Z04 Lunatone white RAL9016 cover and rotary knob Art.Nr. 86459822-Z04

Z05 Lunatone black cover and rotary knob Art.Nr. 86459822-Z05


DALI-2 ROT Touch

Rotary and push button with capacitive sensor buttons for quick and precise control of brightness, colour, or colour temperature. Functionality and effective range for the rotary pushbutton can be set with the 3 or 5 capacitive buttons. The capacitive button will light up after being pressed to indicate the selected mode, the rotary knob will then control for example colour, brightness, etc. Furthermore, it is possible to send individual DALI commands via the capacitive buttons to e.g., recall a scene. Several standard user interfaces are available and customer specific designs can be implemented upon request.

In addition to configuration via the PC software DALI Cockpit, selected settings can also be made using an NFC-enabled smartphone and the Lunatone NFC Android app.


The device can be mounted on commercially available flush-type installation boxes. It is directly supplied by the DALI line. A version with DALI bus power supply (-PS) is also available.

The -INT module is set to instance mode as delivery default (sending event messages instead of direct control commands) for integration in higher-level building management systems with DALI connection, such as those from WAGO or Beckhoff.

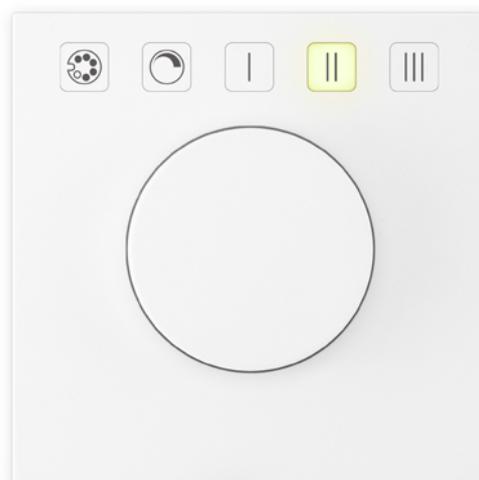

NAME	ARTICEL NUMBER	INPUT TYPE	CURRENT CONSUMPTION DALI	OPERATING TEMPERATURE (TA)	MOUNTING	DIMENSIONS (MM)
DALI-2 ROT Touch	86459338-__	DALI	typ. 1.6mA (at 16,5V) max. 5mA (at 22,5V)	-20°C ... 75°C	for flush-type installation boxes	70 × 70 × 45

Part numbering system:

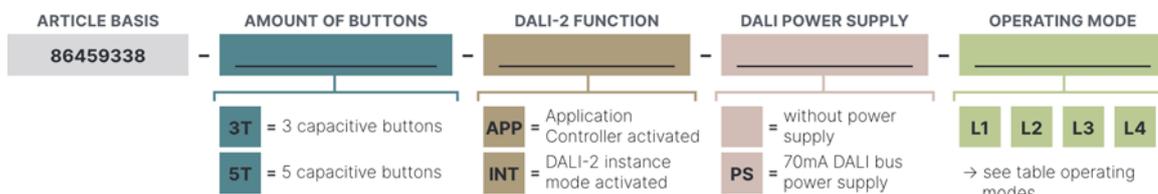

Customer-specific designs can be implemented upon request!
customlayout@lunatone.com

Operating modes:

Layout with 3 buttons -3T

Layout with 5 buttons -5T

Operating Mode	3T Buttons	5T Buttons
L1 Scenes & groups Art.Nr.: 86459338-__-L1	scene 1, scene 2, group 0	scene 1, scene 2, scene 3, group 0, group 1
L2 Scenes, groups & blinds Art.Nr.: 86459338-__-L2	scene 1, group 0, blinds	scene 1, scene 2, group 0, group 1, blinds
L3 Tunable white & scenes Art.Nr.: 86459338-__-L3	CW-WW, brightness, scene 1	CW-WW, brightness, scene 1, scene 2, scene 3
L4 Colour & scenes Art.Nr.: 86459338-__-L4	RGB, brightness, scene 1	RGB, brightness, scene 1, scene 2, scene 3

DALI-2 Switch Cross NFC

Pushbutton module with four programmable buttons. With the PC software DALI Cockpit, each button can be individually configured with target address, button behaviour and DALI commands. In addition to the standard functions of dimming, switching, scene recall, etc., predefined macros such as setting the colour temperature, dynamic scenes and sequences, as well as user defined command lists are supported. Several flexible standard layouts with respective presets such as light & blinds are available. Custom layouts can be implemented upon request.

The device can be ordered with factory setting "application controller" or "instance mode". The factory setting can be changed with the PC software DALI Cockpit or Lunatone NFC App (module "-NFC"). When used as "application controller" the device sends direct control commands. In "Instance" mode only event messages are sent for integration in higher-level building management systems with DALI connection, such as those from WAGO or Beckhoff.

The module "-NFC" supports the adjustment of selected settings




image (from left to right): RAL9010; RAL9016; black




via smartphone (NFC capable) with the Lunatone NFC Android app, in addition to the configuration via the DALI Cockpit.

NAME	ARTICEL NUMBER	INTERFACE	SUPPLY	CURRENT CONSUMPTION DALI	MOUNTING	DIMENSIONS (MM)
DALI-2 Switch Cross	86459793-__	DALI	via DALI line	typ. 1.7mA (at 16,5V) max. 2mA (at 22,5V)	for flush-type installation boxes	8,5 × 82 × 82

Part numbering system:

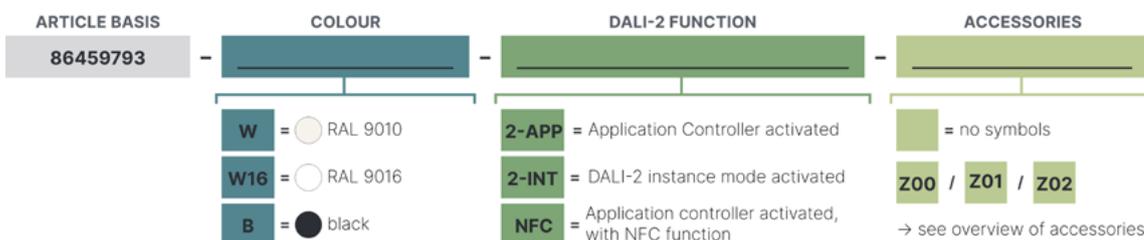

Installation example Art.Nr.: 86459793-__-NFC

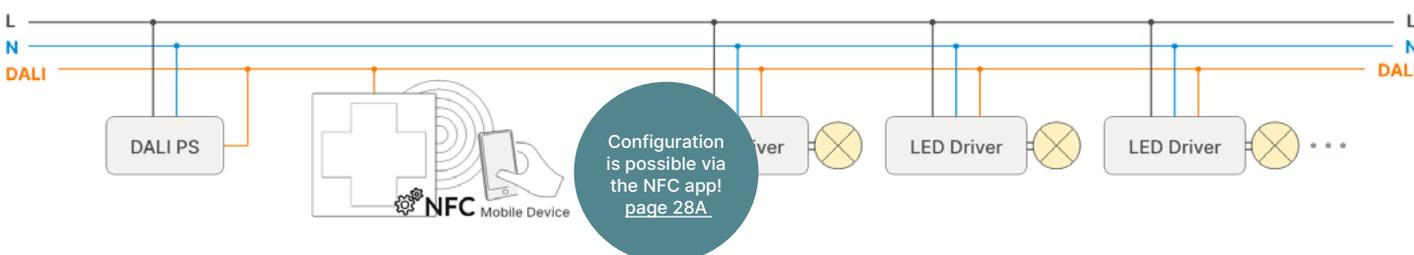

Accessories:

Z00

Individual design? Use our [online configurator](#) or send an inquiry to: customlayout@lunatone.com

Cross plate with customer specific symbols
Art.Nr. 86459793-__-Z00

Z01

Cross plate with symbols for dimming
Art.Nr. 86459793-__-Z01

Z02

Cross plate with symbols for dimming and blind control
Art.Nr. 86459793-__-Z02

37 mm
84 mm

wDALI Switch Cross

This multifunctional DALI control module is wirelessly connected to the DALI line, via a transceiver. The switch is battery powered and can be mounted anywhere within the reception range of the transceiver, without great installation effort. Each button can be individually configured with target address, button behaviour and DALI commands. Beside the standard functions: dimming, switching, scene recall, etc., predefined macros such as setting the colour temperature, dynamic scenes and sequences as well as user defined command lists are also supported. The control buttons can be labeled with different symbols.



NAME	ARTICLE NUMBER	COLOUR	SUPPLY	CURRENT CONSUMPTION DALI TRANSCIVER	FREQUENCY RANGE	DIMENSIONS (MM)
wDALI Switch Cross white incl. Transceiver	86459541-W+T	○ white, RAL9010	Battery*	typ. 3,8mA	2,4GHz	8,5 × 82 × 82 59 × 33 × 15
wDALI Switch Cross RAL9016 incl. Transceiver	86459541-W16+T	○ white, RAL9016	Battery*	typ. 3,8mA	2,4GHz	8,5 × 82 × 82 59 × 33 × 15
wDALI Switch Cross black incl. Transceiver	86459541-B+T	● black	Battery*	typ. 3,8mA	2,4GHz	8,5 × 82 × 82 59 × 33 × 15
wDALI Transceiver	86459587-TR	grey	via DALI line	typ. 3,8mA	2,4GHz	59 × 33 × 15
wDALI Switch Cross white	86459541-W	○ white, RAL9010	Battery*	excl. Transceiver	2,4GHz	8,5 × 82 × 82
wDALI Switch Cross RAL9016	86459541-W16	○ white, RAL9016	Battery*	excl. Transceiver	2,4GHz	8,5 × 82 × 82
wDALI Switch Cross black	86459541-B	● black	Battery*	excl. Transceiver	2,4GHz	8,5 × 82 × 82

*Battery type CR2032, average lifespan ~ 10000 acutations, within 10 years



One wDALI switch can connect to multiple wDALI transceivers!

Accessories:

Z00

Individual design? Use our [online configurator](#) or send an inquiry to: customlayout@lunatone.com

Z01

Cross plate with symbols for dimming

Art.Nr. 86459793-_-Z01
Art.Nr. 86459541-_-Z01


Z02

Cross plate with symbols for dimming and blind control

Art.Nr. 86459793-_-Z02
Art.Nr. 86459541-_-Z02

wDALI Switch Cross accessories: thin plate to stick on at the desired mounting position

NAME	ARTICLE NUMBER	COLOUR
Mounting plate white (for W and W16)	86459541-W16-MP	○
Mounting plate black	86459541-B-MP	●

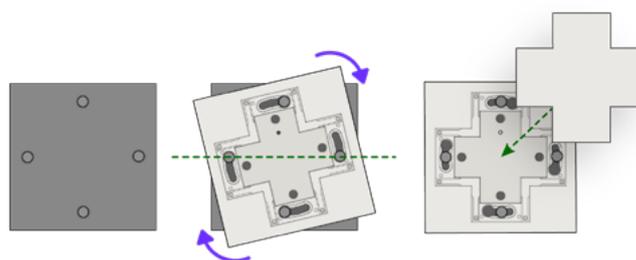


wDALI Remote

A remote control for DALI systems with 12 buttons. This remote control enables location independent control of a DALI system (light, blinds, ventilators, ...). The device communicates wirelessly with a transceiver that is connected to the DALI bus. Each button can be individually configured with target address, button behaviour and DALI commands. Beside the standard functions, dimming, switching, scene recall, etc., predefined macros such as setting the colour temperature, dynamic scenes and sequences as well as user defined command lists are also supported. The device is multi-master compliant and allows the usage of multiple control modules on the DALI line. The control buttons can be labeled with different symbols.




NAME	ARTICLE NUMBER	COLOUR	SUPPLY	CURRENT CONSUMPTION DALI TRANSCEIVER	FREQUENCY RANGE	DIMENSIONS (MM)
wDALI Remote white incl. Transceiver	86459534-W+T	○ white, RAL9010	Battery*	typ. 3,8mA	2,4GHz	140 × 52 × 10 59 × 33 × 15
wDALI Remote black incl. Transceiver	86459534-B+T	● black	Battery*	typ. 3,8mA	2,4GHz	140 × 52 × 10 59 × 33 × 15
wDALI Transceiver	86459587-TR	grey	via DALI line	typ. 3,8mA	2,4GHz	59 × 33 × 15
wDALI Remote white excl. Transceiver	86459534-W	○ white, RAL9010	Battery*	excl. Transceiver	2,4GHz	140 × 52 × 10
wDALI Remote black excl. Transceiver	86459534-B	● black	Battery*	excl. Transceiver	2,4GHz	140 × 52 × 10

*Battery type CR2032, average lifespan ~ 10000 acutations, within 10 years

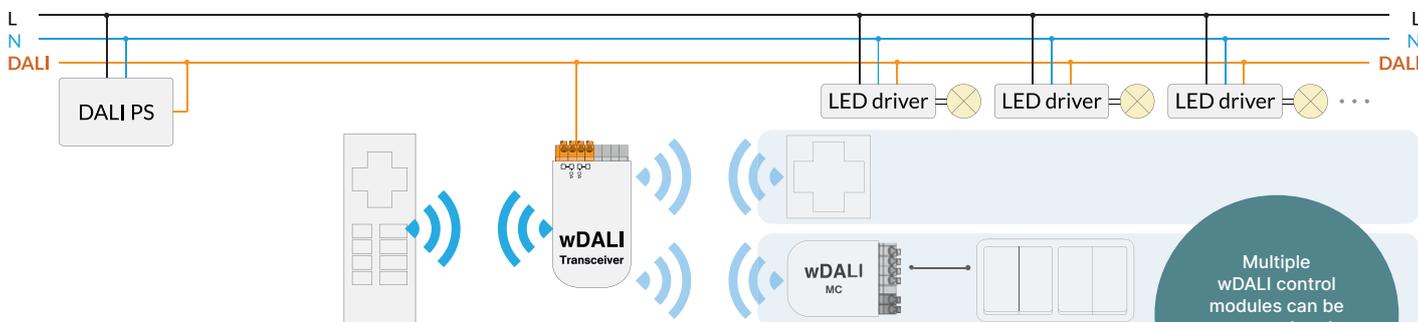

FACTORY SETTING:

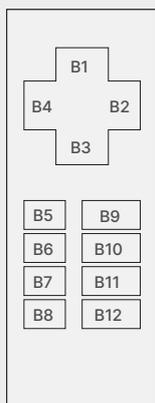

PRESET 1 (FACTORY DEFAULT):

SWITCH & DIM

- B1: on (maximum)
- B3: off
- B4 long press: dim down
- B2 long press: dim up
- B5-B8: on/off group 0 (B5) to group 3 (B8)
- B9-B12: on/off Scene 0 (B9) to scene 3 (B12)

PRESET 2:

SWITCH, DIM & COLOUR TEMPERATURE

- B1: on / maximum
- B1 long press: dim up
- B3: off
- B3 long press: dim down
- B4 long press: colder
- B2 long press: warmer
- The buttons B5-B12 are the same as in FACTORY SETTING 1


wDALI MC - wireless pushbutton coupler

wDALI MC is a wireless version of the DALI MC module. The battery powered wDALI MC module has four pushbutton inputs. Each input can be individually configured with target address, button behaviour and DALI commands. The device can be mounted anywhere within the reception range of the transceiver. The reception range in buildings is usually 10-20m.




NAME	ARTICEL NUMBER	SUPPLY	CURRENT CONSUMPTION DALI TRANSCEIVER	OPERATING TEMPERATURE (TA)	FREQUENCY RANGE	DIMENSIONS (MM)
wDALI MC with Transceiver	89453848+T	Battery*	typ. 3,8mA	-20°C - +75°C	2,4GHz	40 × 28 × 15 59 × 33 × 15
wDALI MC	89453848	Battery*	excl. Transceiver		2,4GHz	40 × 28 × 15
* extra Transceiver	86459587-TR	via DALI line	typ. 3,8mA	-20°C - +75°C	2,4GHz	59 × 33 × 15

*Battery type CR2032, average lifespan ~ 10000 acutations, within 10 years

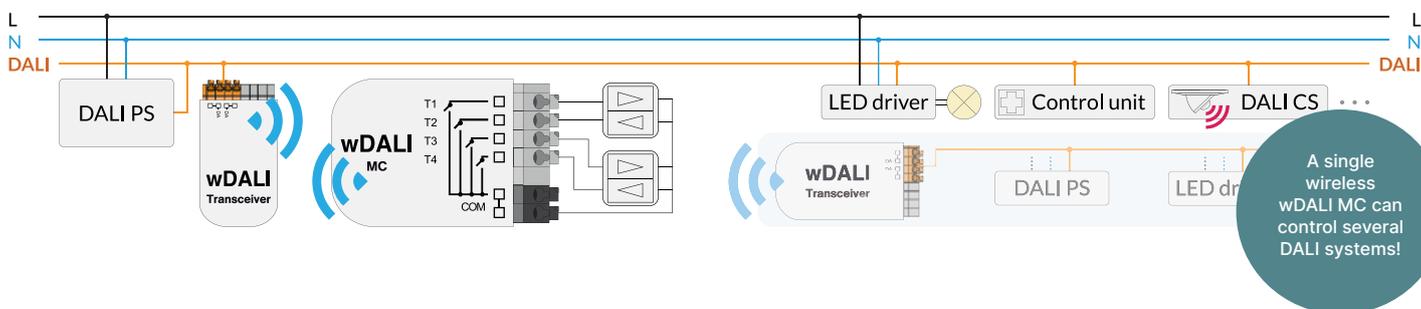

DALI-2 MC - pushbutton coupler


Pushbutton coupler with 4 inputs to connect standard potential free switches or pushbuttons. Each input can be individually configured with target address, button behaviour and DALI commands. In addition to the standard functions of dimming, switching, scene recall, etc., predefined macros such as setting the colour temperature, dynamic scenes, and sequences, as well as user defined command lists are supported. The device can be ordered with factory setting "application controller" or "instance mode". The factory setting can be changed with the PC software DALI Cockpit or Lunatone NFC app (module "-NFC"). When used as "application controller" the device sends direct control commands. In "Instance" mode only event messages are sent for integration in higher-level building management systems with DALI connection, such as those from WAGO or Beckhoff.

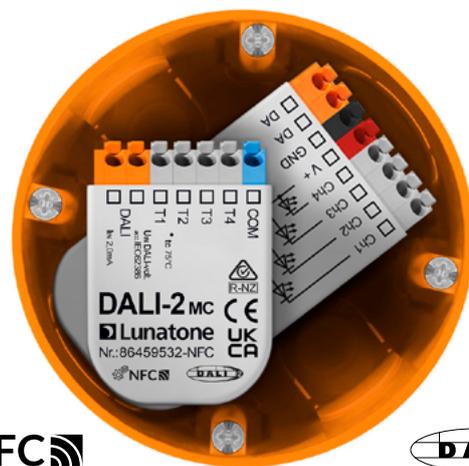

The DALI-2 MC NFC supports the adjustment of selected settings via smartphone (NFC capable) with the Lunatone NFC Android app, in addition to the configuration via the DALI Cockpit. The device is designed to fit behind a switch in a flush-type installation box.

NAME	ARTICEL NUMBER	FACTORY SETTING	NFC	SUPPLY	OPERATING TEMPERATURE (TA)	DIMENSIONS (MM)
DALI-2 MC	86459532-2-app	application controller activated	no	via DALI line	-20°C ... +75°C	40 × 28 × 15
DALI-2 MC	86459532-2-int	instance mode activated	no	via DALI line	-20°C ... +75°C	40 × 28 × 15
DALI-2 MC NFC	86459532-NFC	application controller activated, Android app DALI NFC for configuration	yes	via DALI line	-20°C ... +75°C	40 × 28 × 15

Installation example Art. Nr.: 86459532-NFC

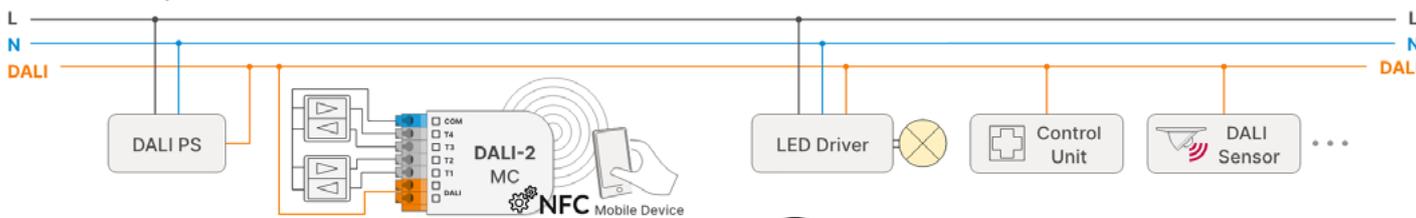

settings for each input

alternative configuration can be activated and deactivated with scene commands or input 4

interpretation of scene command for toggle functions

assigned commands: e.g. light intensity (%), dimming, max, min, scene 0-15, macros, etc.

selection of effective range: broadcast, groups or individual addresses

button function: short press, long press, toggle and many other functions

DALI-2 MC1L - pushbutton coupler


DALI-2 control module with a switching input for mains voltage that is galvanically isolated from the DALI bus. The input can be individually configured with target address, button behaviour and DALI command. Besides the standard functions, dimming, switching, scene recall, etc., predefined macros such as setting the colour temperature, dynamic scenes and sequences as well as user defined command lists are supported. In addition DALI DT8 TC and RGB(W) control is also supported.

Factory setting: the application controller is activated (can be set to instance mode with the PC software DALI Cockpit).



The device is designed to fit behind a switch in a flush-type installation box.

NAME	ARTICEL NUMBER	FACTORY SETTING	SUPPLY	DALI CURRENT CONSUMPTION	INPUT	DIMENSIONS (MM)
DALI-2 MC1L	86458507-1L-2	application controller activated	via DALI line	typ. 4,6mA	1 x 230V	59 x 33 x 15

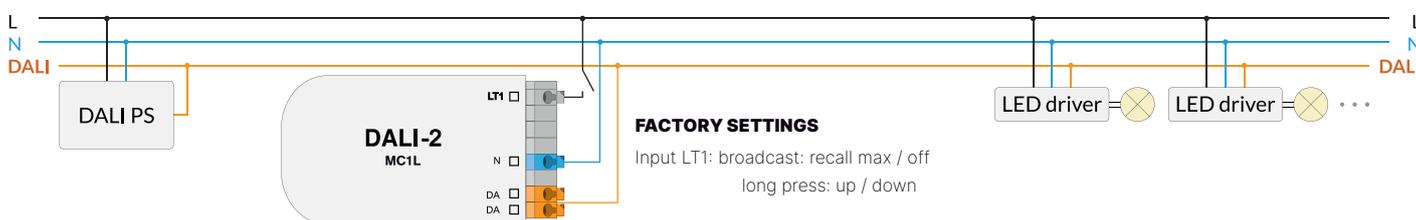


DALI-2 MC4L - pushbutton coupler

DALI-2 control module with four switching inputs for mains voltage that are galvanically isolated from the DALI bus. Each input can be individually configured with target address, button behaviour and DALI command. Besides the standard functions, dimming, switching, scene recall, etc., predefined macros such as setting the colour temperature, dynamic scenes and sequences as well as user defined command lists are supported. The device can be ordered with the factory setting "Application Controller" or "Instance mode". A change is possible with the PC software DALI Cockpit or, with the NFC version, via the DALI NFC Android app.



NAME	ARTICLE NUMBER	FACTORY SETTING	NFC	SUPPLY	DALI CURRENT CONSUMPTION	INPUT	DIMENSIONS (MM)
DALI-2 MC4L	86458507-4L-2-app	application controller activated	no	via DALI line	typ. 1,7mA	4 × 230V	59 × 33 × 15
DALI-2 MC4L	86458507-4L-2-int	instance mode activated	no	via DALI line	typ. 1,7mA	4 × 230V	59 × 33 × 15
DALI-2 MC4L	86458507-4L-NFC	application controller activated Android app DALI NFC for config.	yes	via DALI line	typ. 1,7mA	4 × 230V	59 × 33 × 15
DALI-2 MC4L DIN rail	86458507-4L-HS-2-app	application controller activated	no	via DALI line	typ. 1,7mA	4 × 230V	98 × 17,5 × 57
DALI-2 MC4L DIN rail	86458507-4L-HS-2-int	instance mode activated	no	via DALI line	typ. 1,7mA	4 × 230V	98 × 17,5 × 57

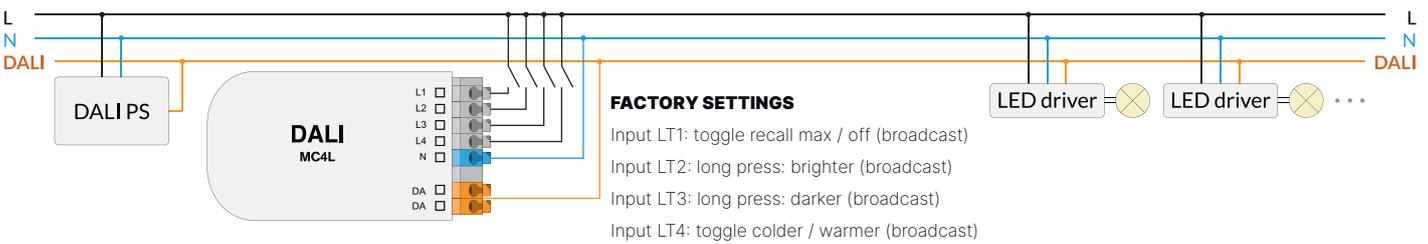

DALI-2 MC1L PS, MC2L PS


Interface with one or two switching inputs for mains voltage that are galvanically isolated from the DALI bus. Each input can be individually configured with target address, button behaviour and DALI commands. Besides the standard functions, dimming, switching, scene recall, etc., predefined macros such as setting the colour temperature, dynamic scenes and sequences as well as user defined command lists are supported. In addition DALI DT8 TC and RGB(W) control is also supported.

Factory setting: the application controller is activated (can be set to



instance mode with the PC software DALI Cockpit). The device is designed to fit behind a switch in a flush-type installation box. The device has an integrated bus power supply (50mA).

NAME	ARTICLE NUMBER	FACTORY SETTING	STROMSUPPLY	INTEGRATED DALI BUS SUPPLY	INPUT	DIMENSIONS (MM)
DALI-2 MC1L PS	86458507-1L-PS	application controller activated	20mA (@120Vac), 10mA (@240Vac)	50mA	1 × 230V	59 × 33 × 15
DALI-2 MC2L PS	86458507-2L-PS	application controller activated	20mA (@120Vac), 10mA (@240Vac)	50mA	2 × 230V	59 × 33 × 15

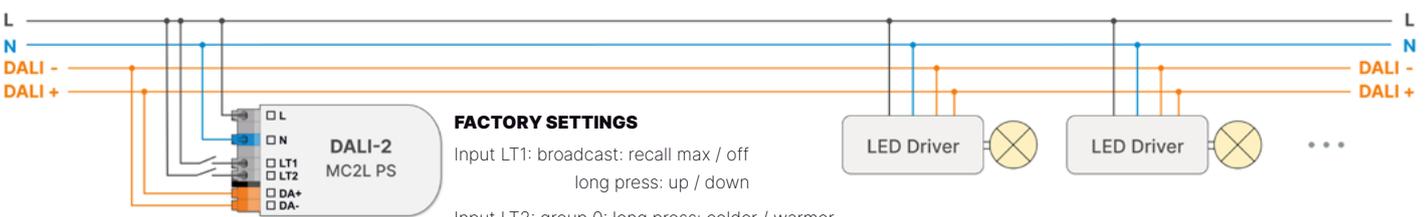


DALI-2 MC4L POTI - pushbutton coupler

Interface with four switching inputs for mains voltage that are galvanically isolated from the DALI bus. Each input can be individually configured with target address, button behaviour and DALI commands. The light level for each input can be conveniently adjusted with the 4 potentiometers on the device. The LEDs indicate the active inputs.

Besides the standard functions, dimming, switching, scene recall, etc., predefined macros such as setting the colour temperature, dynamic scenes and sequences as well as user defined command lists are supported. In addition DALI DT8 TC and RGB(W) control is also supported.


In the delivery state the application controller is activated. With the DALI Cockpit PC software, the device can also be set to instance mode (no direct DALI control commands) for integration

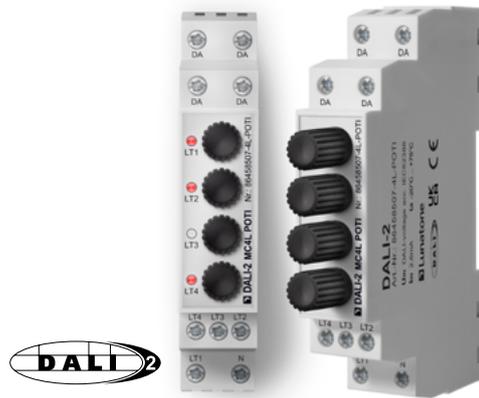

into higher-level building management systems from e.g. WAGO, Beckhoff.

The device is supplied via the DALI bus and is suitable for DIN rail mounting.

NAME	ARTICLE NUMBER	FACTORY SETTING	NFC	SUPPLY	DALI CURRENT CONSUMPTION	INPUT	DIMENSIONS (MM)
DALI-2 MC4L POTI	86458507-4L-POTI	application controller activated	no	via DALI line	typ. 1,7mA	4 x 230V	98 x 17,5 x 57

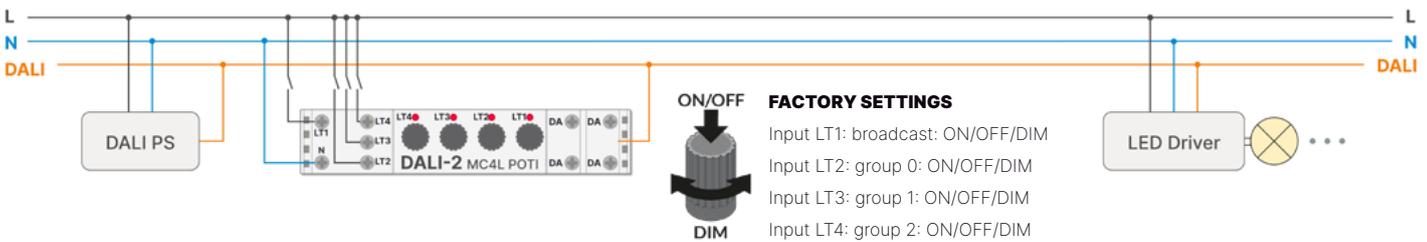

DALI 100K - DALI interface for 100kΩ potentiometer

The DALI 100K enables the control of luminaires in a DALI system with a 100kΩ potentiometer. The analog input signal from the 100kΩ potentiometer is converted into a DALI light level (%), which is transmitted to the DALI bus. Whether the signal should be sent to the entire bus, to groups or to individual addresses can be set with the PC software DALI Cockpit. The analog signals from the potentiometer are either transmitted periodically (1 second - 60



minutes) or whenever the voltage changes (more than 2%). The device is supplied via the DALI bus and is designed to fit behind a potentiometer in a flush-type installation box.

NAME	ARTICLE NUMBER	STROMSUPPLY	DALI CURRENT CONSUMPTION	OPERATING TEMPERATURE (TA)	DIMENSIONS (MM)
DALI 100K	86458506	via DALI line	typ. 3mA	-20°C - +75°C	40 x 28 x 15



EnOcean DALI-2 MC

Compact DALI-2 control module for connection of up to 4 EnOcean pushbuttons to the DALI system. Each of the 4 EnOcean inputs can be individually configured with target address, button behaviour and DALI commands. In addition to the standard functions of dimming, switching, scene recall, etc., predefined macros such as setting the colour temperature, dynamic scenes, and sequences, as well as user defined command lists are supported.


The device can be ordered with factory setting "application controller" or "instance mode". The factory setting can be changed with the PC software DALI Cockpit or Lunatone NFC app (module "-NFC"). When used as "application controller" the device sends direct control commands. In "Instance" mode only event messages are sent for integration in higher-level building



management systems with DALI connection, such as those from WAGO or Beckhoff.

The module with NFC supports the adjustment of selected settings via smartphone (NFC capable) with the Lunatone NFC Android app, in addition to the configuration via the DALI Cockpit. The device is designed to fit behind a switch in a flush-type installation box.

NAME	ARTICLE NUMBER	FACTORY SETTING	NFC	STROM-SUPPLY	DALI CURRENT CONSUMPTION	INPUT TYPE	DIMENSIONS (MM)
EnOcean DALI-2 MC	86463327-app	application controller activated	no	via DALI line	typ. 6mA	4 x EnOcean - wireless (868 MHz)	59 x 33 x 15
EnOcean DALI-2 MC Integration	86463327-int	instance mode activated	no	via DALI line	typ. 6mA	4 x EnOcean - wireless (868 MHz)	59 x 33 x 15
EnOcean DALI-2 MC NFC	86463327-NFC	application controller activated, Android app DALI NFC for configuration	yes	via DALI line	typ. 6mA	4 x EnOcean - wireless (868 MHz)	59 x 33 x 15

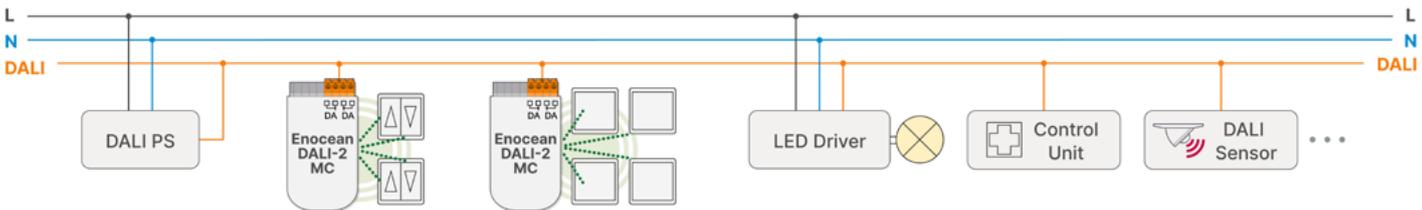

DALI GC(-A) - controlling two DALI groups

DALI GC / GC-A is a control unit to address 2 DALI groups. With this compact module conventional light switches or pushbuttons can be used to send dimming and switching commands to 2 DALI groups. Using the dial on the back of the device the DALI groups can be selected. Configuration with the PC software DALI Cockpit is not necessary. The device is designed to fit behind a light switch in a flush-type installation box.



NAME	ARTICLE NUMBER	STROMSUPPLY	DALI CURRENT CONSUMPTION	DIMENSIONS (MM)
DALI GC	24033450	via DALI line	typ. 6mA	41x30x11
DALI GC-A	24138907	via DALI line	typ. 6mA	41x30x11




DALI SC(-A) - controlling four DALI scenes

DALI SC / SC-A is a control unit to recall DALI scenes. A different light scene can be assigned to each of the 4 independent switch inputs. The dial on the back of the device can be used to define which of the 16 scenes will be recalled when the buttons are pressed. Configuration with the PC software DALI Cockpit is not necessary. The device is designed to fit behind a light switch in a flush-type installation box.



NAME	ARTICLE NUMBER	STROMSUPPLY	DALI CURRENT CONSUMPTION	DIMENSIONS (MM)
DALI SC	24034263	via DALI line	typ. 6mA	41×30×11
DALI SC-A	24138906	via DALI line	typ. 6mA	41×30×11

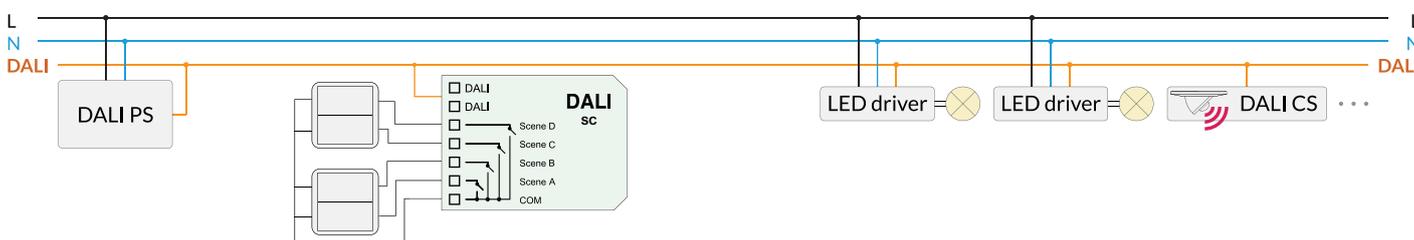

DALI LR PS 20mA - automatic power reduction / night-time brightness reduction

Compact control module for automatic power reduction or night-time brightness reduction. Two operating modes are supported: operating mode B1 for power reduction through mains phase or control phase, operating mode B2 for power reduction based on virtual midnight calculation.


All necessary settings can be made using the rotary and slide switches on the device. The device has an integrated bus power supply (20mA) for up to 7 standard DALI loads, an extension to max. 64 loads is possible with a DALI Expander. The DALI LR PS20 is suitable for installation in flush-type installation boxes or integration in protection class II devices.



NAME	ARTICLE NUMBER	SUPPLY INPUT	INTEGRATED DALI POWER SUPPLY	OPERATING TEMPERATURE (TA)	DIMENSIONS (MM)
DALI LR PS20	89453880	mains voltage 220-240VAC / 50-60Hz	20mA	-20°C ... +55°C	59 × 33 × 15


Operating mode B1:

Power reduction through the mains control phase, the DALI LR is supplied via a separately switched phase.

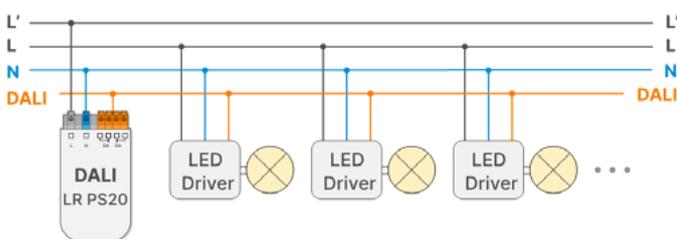

Operating mode B2:

The DALI LR reduces the power during the operating time. The time span can be adjusted, it is always symmetrical to the user-defined virtual midnight.

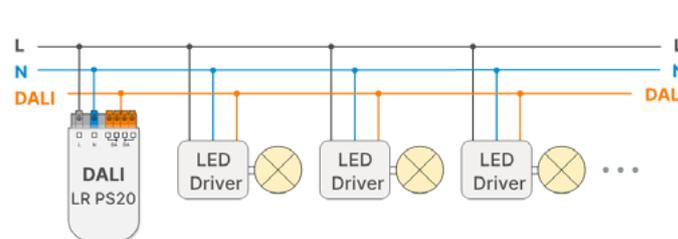


DALI-2 Sequencer - recalling command sequences

DALI-2 control module to automatically recall pre-programmed DALI command sequences. A sequence consists of a series of max. 49 DALI commands, for example a set of colour and light level changes. 4 different sequences can be programmed with the PC software DALI Cockpit. Different delays can be configured for user defined sequences, with times ranging from 0 seconds to 3 hours. Furthermore, it is possible to define whether sequences are looped or run only once. Sequences can be recalled or stopped via scene commands or via the four switching inputs. It is possible to install several DALI-2 Sequencers on one DALI line. Different versions are available, suitable for DIN rail mounting or for installation in flush-type installation boxes.



NAME	ARTICEL NUMBER	CURRENT CONSUMPTION DALI	TIMER	MODEL	DIMENSIONS (MM)
DALI-2 Sequencer	89453371	typ. 1,7 mA	quarz based (~20ppm)	for flush-type installation boxes	40 × 28 × 15
DALI-2 Sequencer DIN rail	89453371-HS	typ. 1,7 mA	quarz based (~20ppm)	for DIN rail	98 × 17,5 × 57

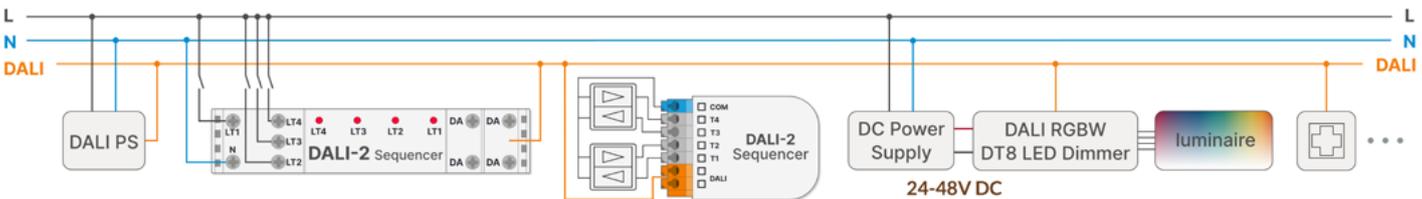

FACTORY SETTINGS

application controller active, effective range: broadcast

4 sequences can be recalled via the inputs:

T1,T2,T3,T4 (model for flush-type installation boxes)

LT1,LT2,LT3,LT4 (model for DIN rail)

sequence mode: M3 dynamic Scene: recall of scenes 0-15

Delay between scenes & fade time:

T1/LT1: 1sec

T3/LT3: 4sec

T2/LT2: 2sec

T4/LT4: 8sec

The sequence runs from scene 0 to scene 15 with 1/2/4/8sec delay and 1/2/4/8sec fade time per scene and is then repeated.

Settings option: "User defined Macros"

Via the configuration panel "User defined Macros" it is possible to define a sequence of DALI commands and its effective range.

Up to 4 sequences (sequence A - sequence D) can be saved in the DALI-2 sequencer.

To create or load a custom macro: select "Macro M5: User Defined Command List" from the Command menu.

A custom sequence can consist of up to 49 DALI commands.

Click "Add..." to add a new entry to the command list. The new entry can contain a DALI command, the effective range for the command and a delay to the following command.

effective range

DALI command

Delay times in ms, delays are adjustable between 0 seconds to max. 3 hours.


Type	Addr	Command	Data	Delay
DALI	G0	GOTO SCENE 0	224	1000
DALI	BcCast	RECALL MAX LEVEL		10000
DALI	G1	DIRECT ARC POWER 233 (56.36%)	233	10000
DALI	A0	DIRECT ARC POWER 203 (24.85%)	203	50000
DALI	BcCast	RECALL MIN LEVEL		10000

DALI CDC - time based colour temperature control

DALI CDC is a control unit that automatically adjusts the colour temperature and light level during the day to simulate daylight, so-called Human Centric Lighting. The device is used together with DALI DT8 TC (tunable white) luminaires. The sequence can be activated and deactivated using scene recalls. Smooth transitions are ensured by sending commands periodically. The sequence can be adjusted with the PC software DALI Cockpit.



NAME	ARTICEL NUMBER	CURRENT CONSUMPTION DALI	TIMER	MODEL	DIMENSIONS (MM)
DALI CDC	89453853	typ. 5mA	quarz based (~20ppm)	for flush-type installation boxes	59 × 33 × 15
DALI CDC DIN rail	89453853-HS	typ. 5mA	quarz based (~20ppm)	for DIN rail	98 × 17,5 × 57

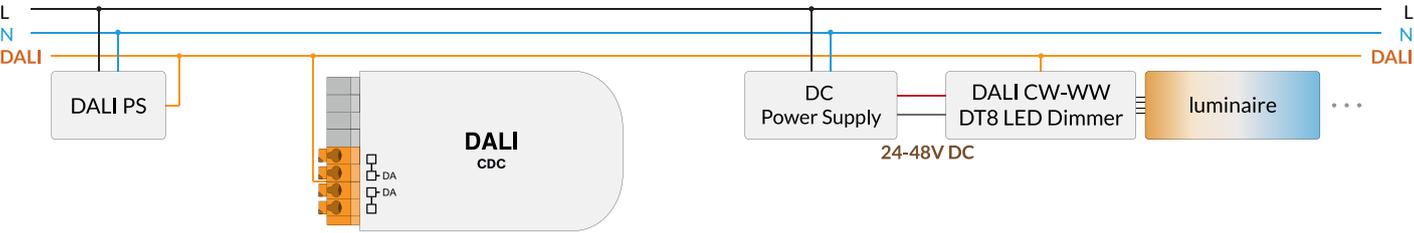

FACTORY SETTINGS

From 18:00 - 06:00: warm light, from 06:00 - 12:00 the light gradually gets colder, at 12:00 o'clock the colour temperature is 5800K, after that the light will gradually warm up again until 18.00 o'clock. When delivered, the brightness is not controlled or changed (DAP = "MASK"). If required, time-based light levels can be set.

Light levels as well as temperature values (in Kelvin) can be changed with the PC software DALI Cockpit.

Parameters can also be set with the DALI Daylight App. [page 29A](#)

time	colour temperature	brightness
24:00	2700K	MASK
01:00	2700K	MASK
02:00	2700K	MASK
03:00	2700K	MASK
04:00	2700K	MASK
05:00	2700K	MASK
06:00	2700K	MASK
07:00	3412K	MASK
08:00	4101K	MASK
09:00	4767K	MASK
10:00	5318K	MASK
11:00	5685K	MASK
12:00	5800K	MASK
13:00	5685K	MASK
14:00	5318K	MASK
15:00	4767K	MASK
16:00	4101K	MASK
17:00	3412K	MASK
18:00	2700K	MASK
19:00	2700K	MASK
20:00	2700K	MASK
21:00	2700K	MASK
22:00	2700K	MASK
23:00	2700K	MASK

DALI-2 RTC+ Timer

The timer module DALI-2 RTC+ enables the configuration and query of date and time as well as time based control of the DALI system – scheduler function.

Up to 32 entries can be defined, each consisting of weekday, days of the month, months, time stamp and DALI commands. Timestamps can be selected not only in absolute terms but also in relation to sunrise and sunset – Astroclock function. The scheduler entries can be activated/deactivated via scene commands. An automatic switchover to daylight saving time can be set.



The device is suitable for installation in flush-type installation boxes or integration in protection class II devices.

NAME	ARTICEL NUMBER	CURRENT CONSUMPTION DALI	TIMER	MODEL	DIMENSIONS (MM)
DALI-2 RTC+ Timer	86457142	typ. 5mA	quarz based (~20ppm)	for flush-type installation boxes	40 × 28 × 15

date, time or an external control can be selected as triggers

effective range of the timer module: entire DALI bus (broadcast), group(s) or individual address(es)

enter the DALI control command or sequence that should be executed on the selected date


DALI NFC App - configuration of basic settings

The DALI NFC App provides an easy and straightforward way to set up and configure DALI devices with a smartphone using Near Field Communication (NFC). It enables reading of device information and configuration of basic settings, including effective range (broadcast, groups or individual addresses).

An important advantage of NFC is that devices can be configured before installation, in an unpowered state.



Application example:

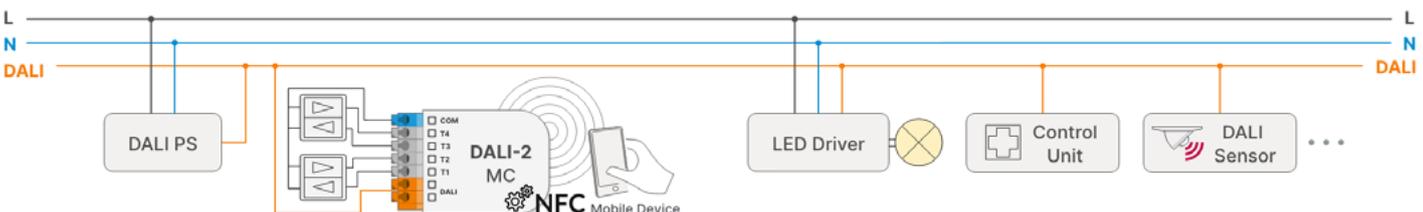

DALI Daylight Interface

DALI Daylight Interface incl. App for iOS and Android allows basic adjustment of the following devices via Bluetooth:

- DALI CDC: changing circadian curve settings (start, peak, end)
- DALI RTC: definition of 2 switching intervals per weekday
- DALI CS: setting light level and hold time
- DALI LS: switching between manual and automatic light level control, specifying the reference light level




DALI Daylight

Here you can download the app for your smartphone!



NAME	ARTICLE NUMBER	INPUT SUPPLY CURRENT	TYP. DALI CURRENT CONSUMPTION	DIMENSIONS (MM)
DALI Daylight Interface	89453863	via DALI line	typ. 4mA	59 × 33 × 15

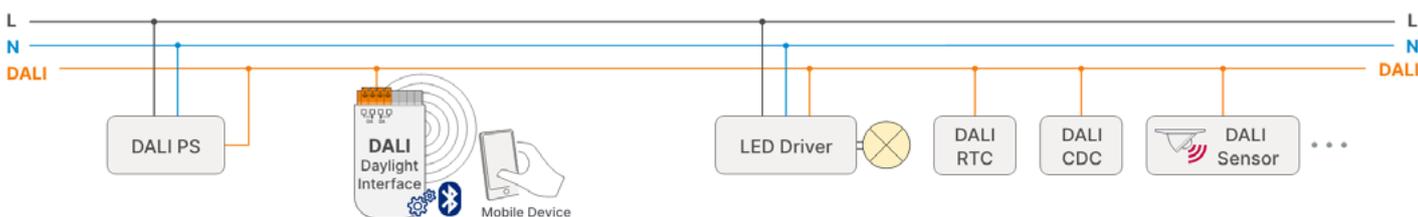

DALI-2 Audio Interface


DALI-2 device for playing internet radio stations. Speakers or intercom systems can be easily connected via a corresponding connector. The control of radio stations and volume works via DALI. Up to 16 internet radio stations can be accessed via scenes. The WLAN interface is used for integration into the local network and to access the internet radio stations.

Configurations can be made with the Lunatone PC software DALI Cockpit.

The device is suitable for remote ceiling installation or integration in luminaires.



NAME	ARTICLE NUMBER	INTERFACE	INPUT SUPPLY CURRENT	OPERATING TEMPERATURE (TA)	DIMENSIONS (MM)
DALI-2 Audio Interface	89943721	DALI, WLAN	mains voltage 31mA (@110Vac), 21mA (@240Vac)	-20°C ... +60°C	159 × 41 × 22

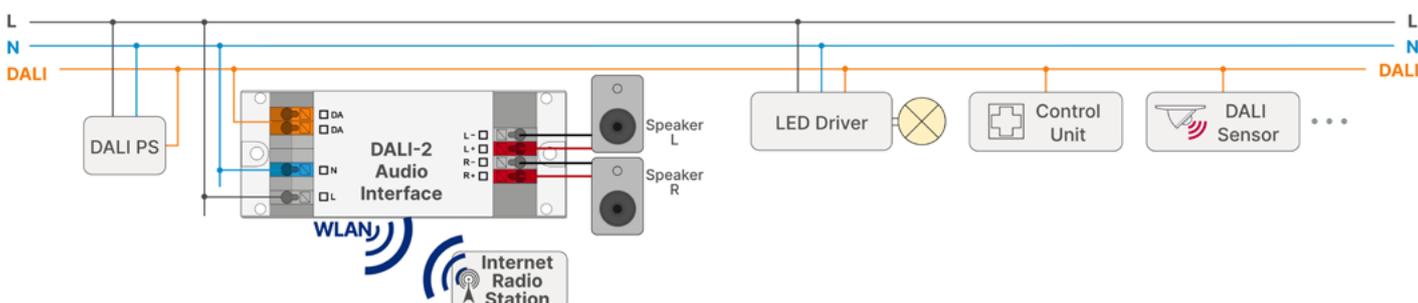

DALI-2 CS - sensor module

Compact sensor module with motion detection (PIR) and light intensity measurement for DALI and DALI-2 systems. The module can either be used to directly control the DALI system (application controller) or simply to gather measurements for a building management system (instance mode).

The DALI-2 CS can be configured with the PC software DALI Cockpit to send various DALI commands upon motion detection (on/off, max, min, scene, ...) to either the entire DALI system, groups, or individual addresses.

The module contains a light sensor and can automatically adjust room lighting (constant light control). 4 operating modes are supported: motion triggered; motion triggered with constant light control; constant light control; light control via 4 thresholds. All measured values can be read out via the DALI line. In addition, alternative behaviour and parameters can be set, for example to change between different destination addresses or light values. Multiple sensors within one group will synchronise automatically. The device is powered directly by the DALI bus.

DALI-2 CS is available in three different housings: for direct mounting on cavity walls or installation boxes (standard), for suspended ceilings (with spring), or for surface mounting (with backbox). Available housing colours are pure white RAL 9010, traffic white RAL 9016 (-W16) or black (-B).

Factory setting: motion detection and 10min hold time before the off command.


Version DALI-2 CS “-THP” offers an integrated temperature,




relative humidity and air pressure sensor and version “-THP-AQ” adds air quality measurement to the above.

NAME	ARTICEL NUMBER BASE	BRIEF DESCRIPTION	INTER-FACE	SUPPLY	DALI CURRENT CONSUMPTION	(TA) OPERATING TEMPERATURE
DALI-2 CS	86458670-__	DALI-2 sensor for motion and light, application controller and instance mode	DALI	via DALI line	typ. 3,5mA	
DALI-2 CS Integration	86458670-INT-__	DALI-2 sensor for motion and light, instance mode for Integration in systems with central control units	DALI	via DALI line	typ. 3,5mA	-20°C ... +60°C
DALI-2 CS Integration THP	86457786-INT-__	DALI-2 sensor for motion, light, temperature, relative humidity and air pressure, instance mode for Integration in systems with central control units	DALI	via DALI line	typ. 3,5mA	except sensor High Density Long Distance Art.Nr.: 86458670_-15-_-
DALI-2 CS Integration THP-AQ	86457786-INT-AQ-__	sensor for motion, light, temperature, relative humidity, air pressure and air quality, eCO2; instance mode for Integration in systems with central control units	DALI	via DALI line	typ. 3,5mA	-20°C ... +55°C






Installation example DALI-2 CS Integration:

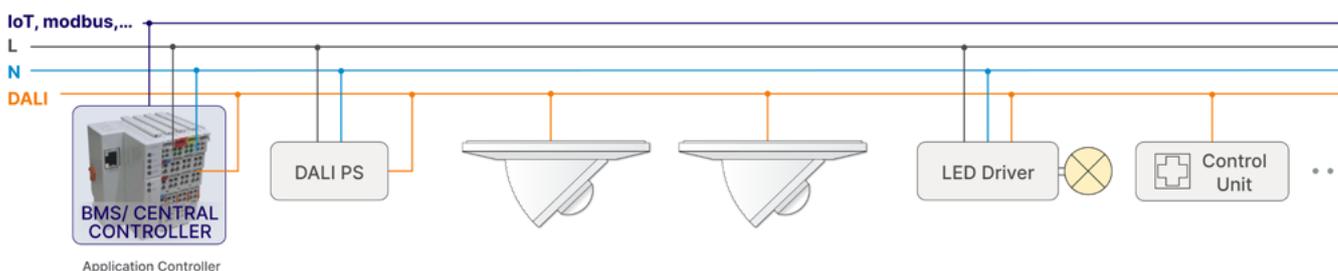


Part numbering system DALI-2 CS: LIGHT AND MOTION SENSOR (PIR)

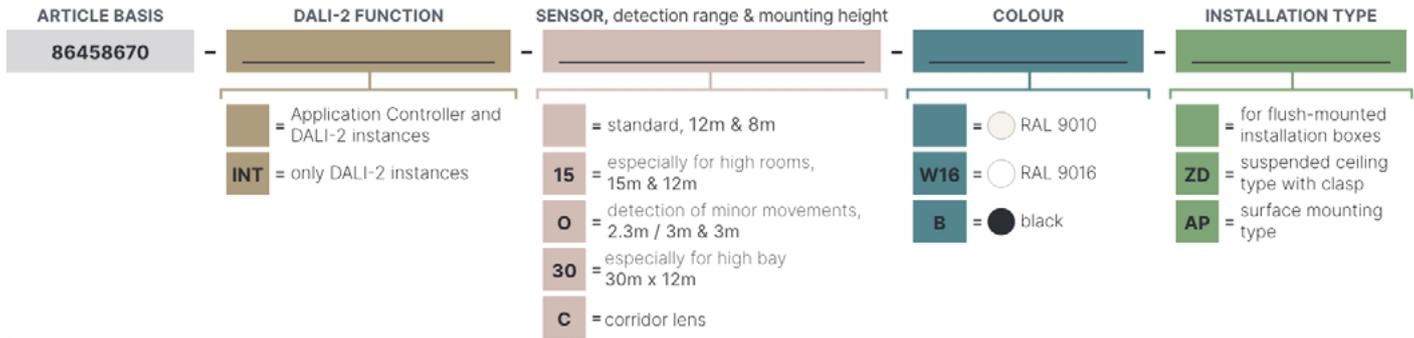


Lens types:

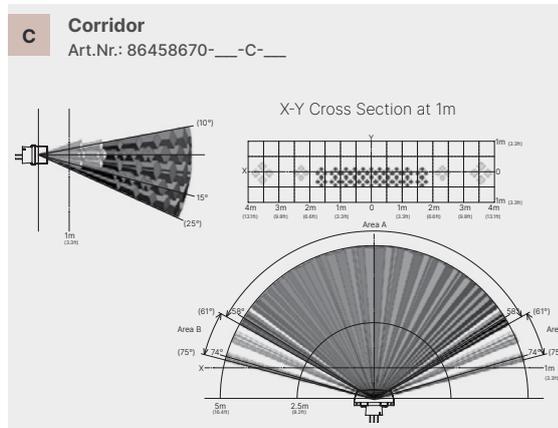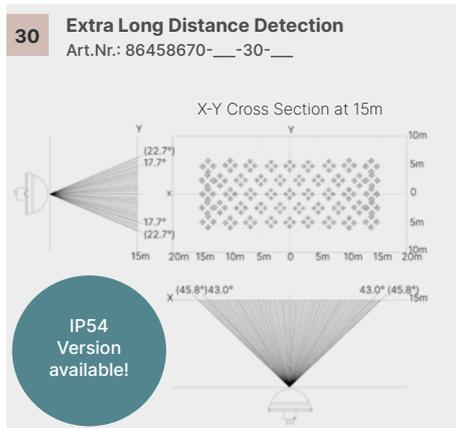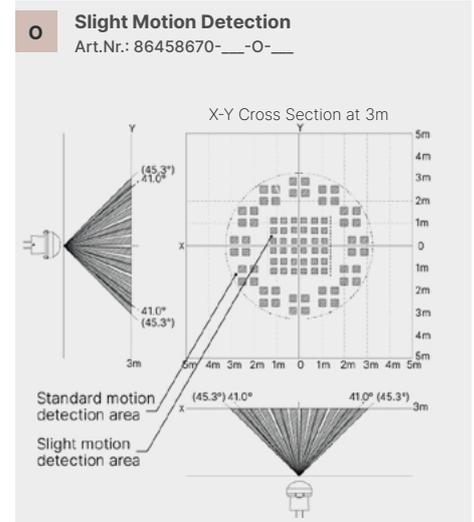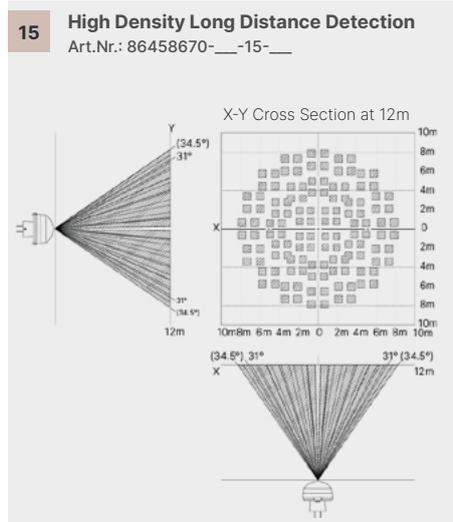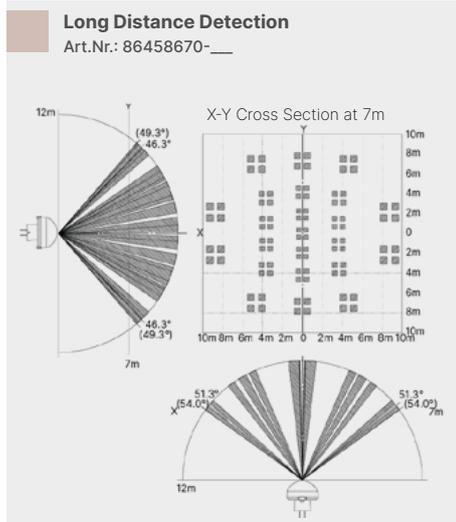




Installation types:

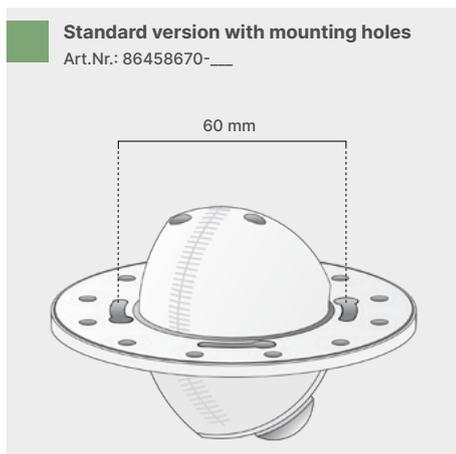


Part numbering system DALI-2 CS THP: LIGHT AND MOTION SENSOR (PIR) + TEMPERATURE, HUMIDITY, AIR PRESSURE, (AIR QUALITY WITH -AQ)

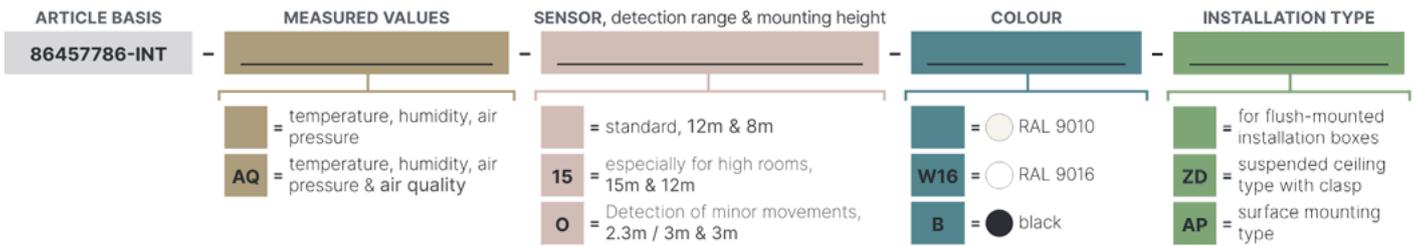

Lens types:

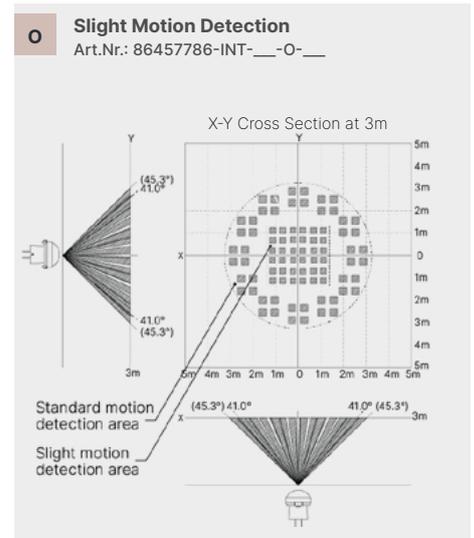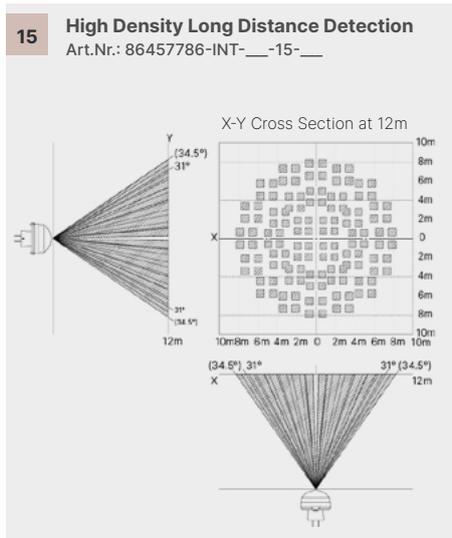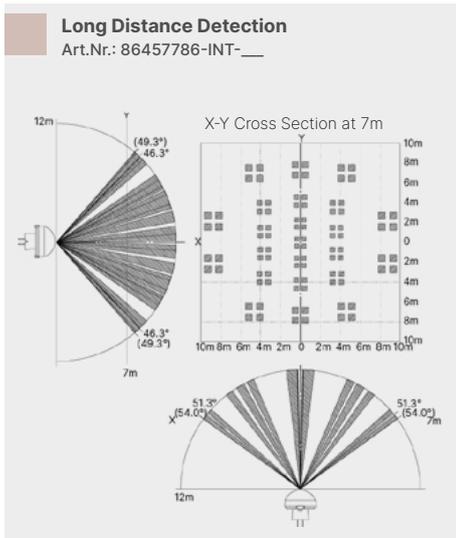

Installation types:

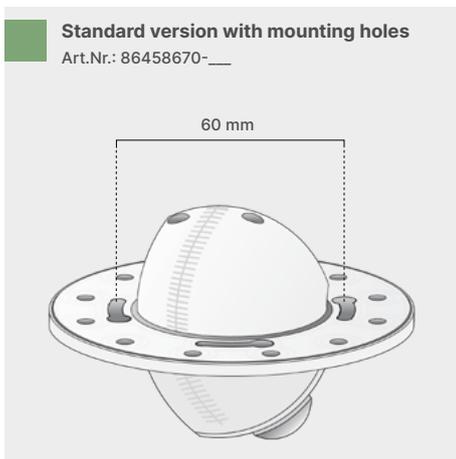



Device Info

Name	DALI-2 CS	Article Number	N/A	GTIN	
Manufacturer	Lunatone	Serial Number	1	FW	??
Device Type	-	Type	Control Device		
DALI Ver	unknown	Short Address	(A0 ²) DALI-2 CS		


General | Instances | Wirkbereich | Motion Control

Behavior on movement


Current Light Level Lux

Sequence


Movement State



Transition State



Vacant State



with retriggering

Movement state

1. On Command Light Level (DAP) Light Level: 100 %
 Fade time [7] 5.6 sec

2. Hold Time 30 min 0 sec

Transition state

3. Mid Level Command RECALL MIN LEVEL

4. Second Level Hold Time 10 min 0 sec

Vacant State

5. Off Command OFF

Switch-on threshold

Cmd X only sent if light value > threshold value (i.e. day) Threshold: 600 Lux

Cmd X only sent if light value < threshold value (i.e. night) Hysteresis: 50 Lux

Bright Out: Retrigger by motion only if Light Level < Bright-Out-Threshold Bright-Out-Threshold: 500 Lux

Cmd X is independent of the light sensor

Behavior at external commands on the sensor destinations

ON Movement simulation

OFF End of sequence

Dimming no influence

Variable Operating Behavior

Activation

Scene Command On Destination Address

Scene Command On own DALI Address

Scene 0	3 - Alternative Destinations	G5
Scene 1	4 - Alternative On Command(1) Light Level DAP	80 %
Scene 0	1 - no action	
Scene 0	1 - no action	

this graph shows the different stages of the sensors lighting control - the points below refer to this graph

command that is executed when motion is detected → section 1 in the graph

The following commands can be selected as ON-commands: light intensity (%), max, min, scene 0-15, last active light level

Hold Time: How long should the 1st light level be active for? → section 2 in the graph

command executed after the 1st Hold Time: → section 3 in the graph

the following commands can be selected for the Mid Level Command: no action, light intensity (%), max, min, scene 0-15, last active light level

2nd level Hold Time: How long should the second light level be active for → section 4 in the graph

command executed after the 2nd Hold Time: → section 5 in the graph

the following commands can be used as OFF commands: light intensity 0%, off, scene 0-15

definition of the device behaviour, when an external on / off / dimming command is sent to the sensors effective range - depending on the operating mode

the behaviour of the sensor can be changed by recalling a scene

shows currently measured light value as a reference

settings for the motion detection sequence → with or without constant light control, depending on the operating mode

switch-on and switch-off threshold: it can be defined above or below which threshold value the motion and light control is active

DALI-2 CS Mini

Compact sensor module with integrated motion detection (PIR), light intensity measurement and light control unit.

In addition to the standard detection in the outer area, DALI-2 CS Mini has a more sensitive inner detection area for the detection of minor movements.

DALI-2 CS Mini can be configured with the PC software DALI Cockpit to send various DALI commands upon motion detection to either the entire DALI system, groups or individual addresses. The module also contains a light sensor to deactivate motion detection when there is sufficient lighting. Activating the integrated light control unit enables DALI constant light control in a simple manner. Several sensors can be used in a group, one sensor can be selected as master, while the others feed in their light and motion sensor values, the evaluation can be set to minimum, maximum or average value.

The device is powered directly by the DALI bus.

The module is available in two different versions: for indoor and outdoor use (IP65), as well as two different colours: black and white (RAL9016)

Art.Nr.: 86457244-INT-__ : Version for integration in systems with central control units:


DALI-2 CS Mini Integration gathers measurements for a building



management system (DALI-2 CS Master, WAGO, Beckhoff, etc.). The measured values can be queried or automatically trigger events when sensor value changes occur. This functionality is implemented via DALI-2 instances. The DALI-2 CS Mini Integration can be configured accordingly in the PC software DALI Cockpit. The device is powered directly by the DALI bus.


NAME	ARTICEL NUMBER BASE	BRIEF DESCRIPTION	INTERFACE	SUPPLY	DALI CURRENT CONSUMPTION	(TA)OPERATING TEMPERATURE
DALI-2 CS Mini	86457244-__	sensor module (motion/brightness), presence sensor 2.5m, constant light control; application controller activated	DALI	via DALI line	typ. 3,5mA	-20°C ... +60°C
DALI-2 CS Mini Integration	86457244-INT-__	sensor module (motion/brightness), presence sensor 2.5m, constant light control; instance mode for system integration	DALI	via DALI line	typ. 3,5mA	-20°C ... +60°C

Part numbering system DALI-2 CS Mini:

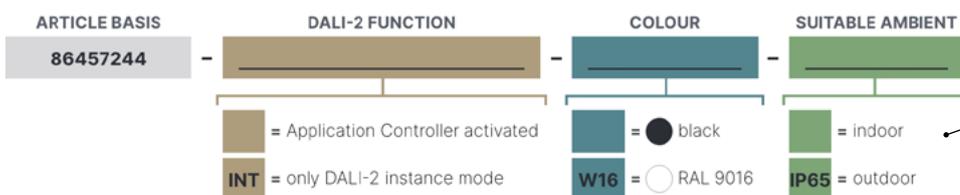


standard version for indoor use (IP20) or Art.Nr.: 86457244-__-IP65 for outdoor use (IP65)

Lens type: Slight Motion Detection

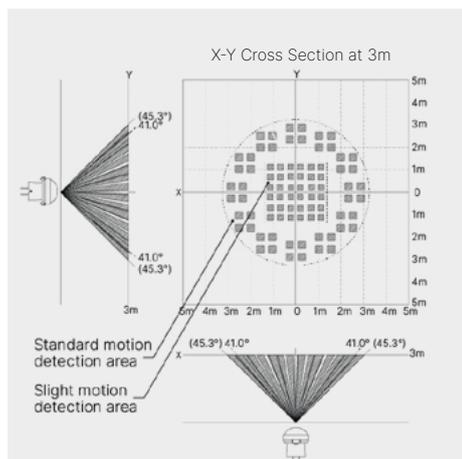


Dimensions of sensor

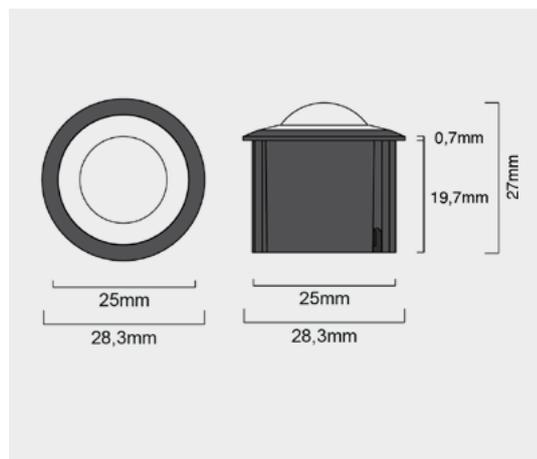

Accessories

Cover to limit the detection area

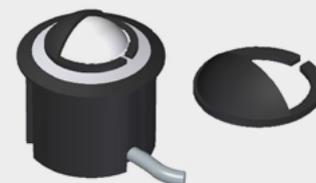

ARTICLE NUMBER	COLOUR
86457244-Z01-B	●
86457244-Z01-W16	○

DALI-2 CS Corridor

Compact sensor module with integrated motion detection (PIR), light intensity measurement and light control unit.

Due to the horizontal detection angle (150°), the sensor is particularly suitable for wall mounting, e.g. in corridors.

DALI-2 CS Corridor can be configured with the PC software DALI Cockpit to send various DALI commands upon motion detection to either the entire DALI system, groups or individual addresses.

The module also contains a light sensor to deactivate motion detection when there is sufficient lighting. Activating the integrated light control unit enables DALI constant light control in a simple manner. Several sensors can be used in a group, one sensor can be selected as master, while the others feed in their light and motion sensor values, the evaluation can be set to minimum, maximum or average value.

The device is powered directly by the DALI bus.

The module is available in two different versions: for indoor and outdoor use (IP65)

Art.Nr.: 88793325-INT-_ : Version for integration in systems with central control units:


DALI-2 CS Corridor Integration gathers measurements for a




building management system (DALI-2 CS Master, WAGO, Beckhoff, etc.). The measured values can be queried or automatically trigger events when sensor value changes occur. This functionality is implemented via DALI-2 instances. The DALI-2 CS Corridor Integration can be configured accordingly in the PC software DALI Cockpit. The device is powered directly by the DALI bus.

NAME	ARTICLE NUMBER	BRIEF DESCRIPTION	INTERFACE	SUPPLY	DALI CURRENT CONSUMPTION	(TA)OPERATING TEMPERATURE	OPERATION AREA
DALI-2 CS Corridor	88793325	horizontal detection angle for motion, brightness; constant light control; application controller activated	DALI	via DALI line	typ. 3,5mA	-20°C ... +60°C	indoor use (IP20)
DALI-2 CS Corridor IP65	88793325-IP65	horizontal detection angle for motion, brightness; constant light control; application controller activated	DALI	via DALI line	typ. 3,5mA	-20°C ... +60°C	outdoor use (IP65)
DALI-2 CS Corridor Integration	88793325-INT	horizontal detection angle for motion, brightness; constant light control; instance mode for Integration with central control units	DALI	via DALI line	typ. 3,5mA	-20°C ... +60°C	indoor use (IP20)
DALI-2 CS Corridor Integration IP65	88793325-INT-IP65	horizontal detection angle for motion, brightness; constant light control; instance mode for Integration with central control units	DALI	via DALI line	typ. 3,5mA	-20°C ... +60°C	outdoor use (IP65)

horizontal detection angle

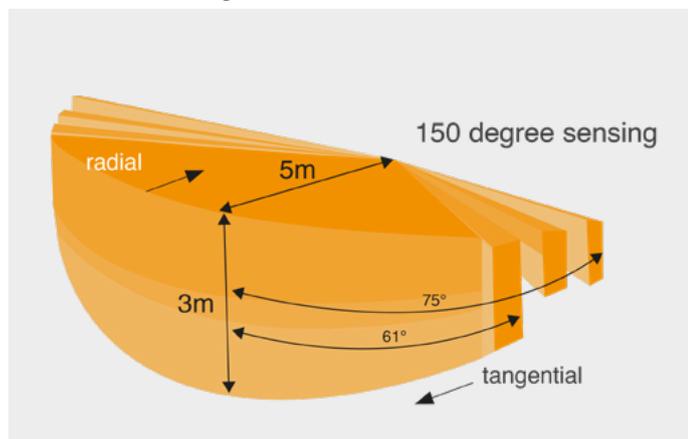

Dimensions of sensor

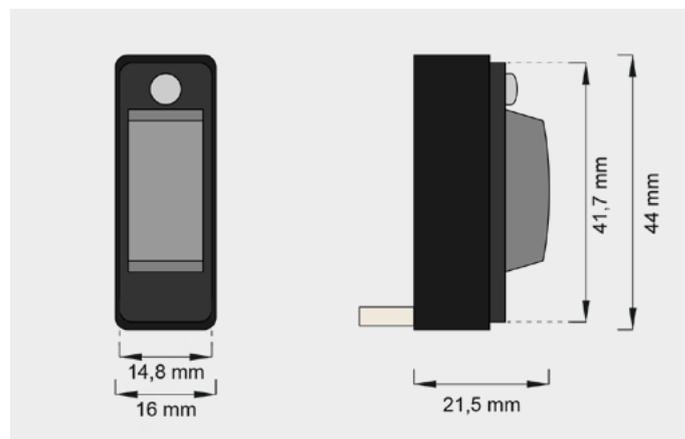

DALI CS with 20mA DALI bus power supply

Compact DALI motion and light sensor with integrated bus power supply. The module consists of a ceiling insert housing and a sensor unit. The module can be used as a control unit for a DALI system or integrated in a building management system as simple sensor unit. The module is suitable for various applications such as offices, class rooms, corridors or halls. Following settings can be configured: target address, DALI control commands, constant light control and hold time. Several sensors can be used in a group, the sensors are synchronised automatically.

Images from left to right: Art.Nr.: 89453862, Art.Nr.: 89453862-15, Art.Nr.: 89453862-O




NAME	ARTICLE NUMBER	BRIEF DESCRIPTION	DETECTION RANGE	MOUNTING HEIGHT	DALI CURRENT CONSUMPTION	INTEGRATED DALI POWER SUPPLY
DALI CS PS 20mA 12m	89453862	motion, brightness sensor 12m, constant light control,	12m &	max. 8m	typ. 3,5mA	20mA
DALI CS PS 20mA 15m	89453862-15	motion, brightness sensor 15m / max 12m mounting height	15m & 12m	max. 12m	typ. 3,5mA	20mA
DALI CS PS 20mA 2,5m	89453862-O	motion, brightness, presence sensor 2.5m (office), constant light control,	2.3m / 3m	max. 3m	typ. 3,5mA	20mA

DALI SI, SI-1L

Sensor Interface to connect e.g. conventional motion sensors, contact switches or photoelectric sensors to a DALI system. Configuration options are similar to the DALI CS: effective range, target address, DALI commands for on/off and hold times, light levels etc. Multiple sensors within one group synchronise automatically. Two different versions are available, one with switching input for potential free contacts (DALI SI), the other with switching input for mains voltage (DALI SI1L). The device is designed to fit behind a light switch in a flush-type installation box.



NAME	ARTICLE NUMBER	INPUT SUPPLY CURRENT	TYP. DALI CURRENT CONSUMPTION	CONTROL INPUT	DIMENSIONS (MM)
DALI SI	89453850	via DALI line	2,9mA	1 switching input for potential free contact	40 × 28 × 15
DALI SI-1L	89453850-1L	via DALI line	2,9mA	1 switching input for mains voltage	59 × 33 × 15

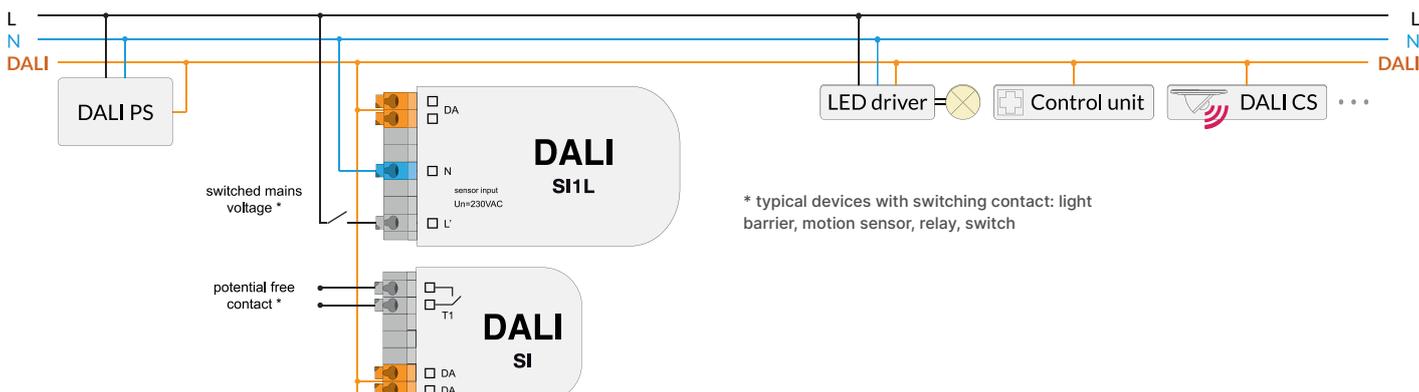

DALI-2 LS - light sensor

Compact light sensor module for DALI and DALI-2 systems. 2 operating modes are supported: constant light control or light control via 4 threshold values.

The operating mode can easily be changed via scene calls or external DALI commands. The constant light control automatically regulates the light level of individual luminaires or luminaire groups to a user-defined light value. Blinds and roller blinds can be automated via user-defined light thresholds.

The module can either be used to directly control the DALI system (application controller) or simply to gather measurements for a building management system (instance mode). Multiple sensors can be used in one system. The measured values can be read out via the DALI line. The device is powered directly by the DALI bus.

DALI-2 LS is available in three different housings: for direct mounting on cavity walls or installation boxes (standard), for suspended ceilings (with spring), or for surface mounting (with



backbox). Available housing colours are pure white RAL 9010 and traffic white RAL 9016 (-W16).

Factory setting: application controller – master mode, constant light control, target value 500lx, effective range: broadcast


NAME	ARTICLE NUMBER	COLOUR	INTERFACE	SUPPLY	DALI CURRENT CONSUMPTION	(TA)OPERATING TEMPERATURE	MODEL
DALI-2 LS RAL9010	68791433	RAL9010	DALI	via DALI line	typ. 3,5mA	-20°C ... +60°C	standard version with mounting holes
DALI-2 LS RAL9010 for surface mounting	68791433-AP	RAL9010	DALI	via DALI line	typ. 3,5mA	-20°C ... +60°C	for surface mounting (with backbox)
DALI-2 LS RAL9010 for suspended ceilings	68791433-ZD	RAL9010	DALI	via DALI line	typ. 3,5mA	-20°C ... +60°C	for suspended ceilings (with spring)
DALI-2 LS RAL9016	68791433-W16	RAL9016	DALI	via DALI line	typ. 3,5mA	-20°C ... +60°C	standard version with mounting holes
DALI-2 LS RAL9016 for surface mounting	68791433-W16-AP	RAL9016	DALI	via DALI line	typ. 3,5mA	-20°C ... +60°C	for surface mounting (with backbox)
DALI-2 LS RAL9016 for suspended ceilings	68791433-W16-ZD	RAL9016	DALI	via DALI line	typ. 3,5mA	-20°C ... +60°C	for suspended ceilings (with spring)

DALI Temp - temperature sensor

The DALI Temp PT1000 sensor module is used to measure temperatures. Alongside the integrated temperature sensor, an external PT1000 sensing element can be added. The device can be used to control blinds or to monitor luminaire temperatures or temperatures of a heating system. All measured values can be queried via DALI.



NAME	ARTICLE NUMBER	SUPPLY	DALI CURRENT CONSUMPTION	TEMPERATURE MEASUREMENT RANGE (INTERNAL SENSOR)	TEMPERATURE MEASUREMENT RANGE (EXTERNAL PT1000)	DIMENSIONS (MM)
DALI Temp Sensor	86459544	via DALI line	typ. 2,6mA	0°C ... +75°C	-25°C ... +125°C	40 × 28 × 15

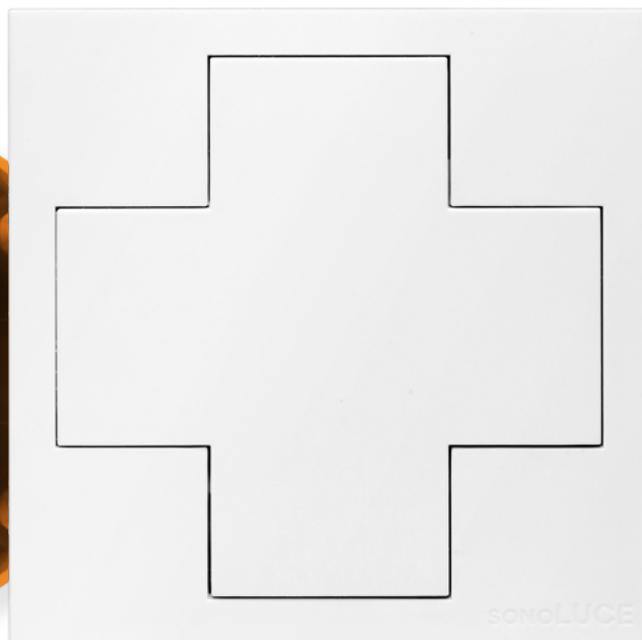

JUMITECH

Snedkervej 2B
DK-4600 Køge

Telefon 20 20 52 54
salg@jumitech.dk

www.jumitech.dk